


BL-858M48S | BioPro Series

8MP Starlight Motorized Lens Facial Recognition Bullet IP Camera

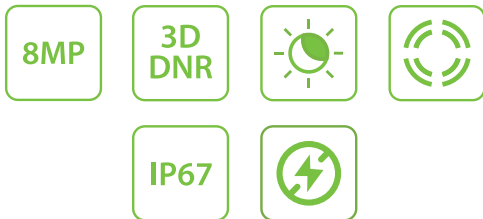

- 1/1.8" 8MP Sony STARVIS CMOS sensor
- H.265+ triple-stream encoding
- High-quality optical lens: 3.6~11mm
- 80m IR effective range
- Built-in PoE
- An embedded facial recognition algorithm
- Capacity of 2,000 face templates in the camera
- White/Black-list alarm deployment
- Intelligent video analytics available
- Multiple web browsers supported
- Remote viewing with mobile application or VMS
- Lightning protection up to 6KV
- IP67 metal casing

System Overview

Powered by Sony STARVIS's super high definition sensor providing up to 4K ultra HD videos and excellent night vision, together with true WDR and cutting-edge technology, the BioPro series of 8MP starlight IP cameras is a high-end professional project-oriented solution for ideal images and video surveillance in indoor and outdoor environments from day to night.

With embedded facial recognition algorithm, cameras of the BioPro series could rapidly capture and compare the acquired face data with face templates stored in the database. The series also supports White/Black list event alarm deployment in different scenarios.

The BioPro series also offers multiple industry-leading Intelligent video analytic functions, such as Face Detection, Line Crossing, Intrusion, Object Left/Lost, Counting, for smart event alarms.

P2P cloud function is built-in for every device which is more convenient and flexible for remote real-time viewing. The BioPro series 8MP IP cameras also supports registration of face templates remotely from the mobile Application AntaView Pro which provides great convenient user experience.

Functions

H.265+

H.265+ technology is an evolutionary optimization of H.265 and the traditional H.264. It includes a series of encoding strategies such as dynamic ROI, smart 2D&3D noise reduction for delivering high-quality videos, and significantly saving up to 70% bandwidth and storage.

Protection

With its precise mechanical and rugged metal casing design, IP cameras of the BioPro series rated IP67 could stand against water and dust for a long time.

With 10% of input voltage tolerance, the cameras could work safely under extreme or unstable power conditions.

With a working temperature range from -30°C to 60°C, the cameras could adapt to a variety of harsh outdoor environments.

Technical Parameters

Camera

Model	BL-858M48S	Flash / DDR	1Gb / 4Gb
Image Sensor	1/1.8" Sony STARVIS CMOS	IR LED No.	4
Effective Pixels	3840*2160	IR Distance	80m
Min. Illumination	Color: 0.1Lux@F1.5 (AGC ON) B/W: 0.001Lux@F1.5 (AGC ON)	S/N Ratio	>52dB

Lens

Lens Type	Motorized	Aperture	F1.5
Mount Type	Board-in	FOV	50°~103°
Focal Length	3.6mm~11mm	Optical Zoom	3X

Video

Compression	H.265+ / H.265 / H.264	WDR	TWDR
Resolution	8MP (3840 x 2160) / 5MP (2592 x 1944) / 3MP (2048 x 1536) / 1080P (1920 x 1080) / 1.3MP (1280 x 960) / 720P (1280 x 720) / D1 (720 x 576) / VGA (620 x 480) / CIF (352 x 288)	Day / Night	Support
Bitrate Control	CBR / VBR	White Balance	Support
Bitrate	16Mbps ~ 20Mbps	Defog	N/A
Multi-Streaming	Main Stream: 4K@15fps / 5M@25fps / 4MP@25fps / 3MP@25fps / 2MP@25fps	Noise Reduction	2D/3D DNR
	Sub Stream: 720P@25fps / D1@25fps / VGA@25fps / CIF@25fps	Mirror/Flip	Support
	Third Stream: 720P@25fps / D1@25fps / VGA@25fps / CIF@25fps	Corridor Mode	Support
Motion Detection	Support	HLC	Support
Digital Zoom	Support	BLC	N/A
Audio Compression	G7.11u	ROI	4 areas
Privacy Mask	5 areas	Anti-flicker	Support

IVA

Intelligent Video	Facial Recognition / Line Crossing / Intrusion / Object Left / Lost / Counting / Video Shelter / Scene change / Audio Detection / Fire Detection / VQD
-------------------	---

Facial Recognition

Face Templates	2,000	Face Quality Filtering	Support
Face Detected Per Frame	30	Detection Area	User-defined
Detected Face Size	80x80 ~ 300x300 Pixels	Capture Response	≤1s

Network			
Protocol	TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, NTP, PPPoE, UPnP, SMTP	Management Software (VMS)	AntarVis 2.0 ZKBioSecurity IVS BioAccess IVS
Interoperability	ONVIF Profile S, SDK, API	Operation System	Windows
Max. Online Users	5	Mobile APP	AntarView Pro
Web Browser	IE / Firefox / Chrome / Safari	P2P Cloud Service	Support

Note: Video streaming is not available for Firefox/Chrome/Safari

Interface			
Ethernet	1 RJ-45 port (10/100Mbps)	Reset Button	N/A
Audio I/O	1/1	Micro-SD Slot	N/A
Alarm I/O	N/A	ANR	N/A
RS485	N/A	USB	N/A

General			
Power Supply	PoE (IEEE802.3af), DC12±10%	Working Temperature	-30°C ~ 60°C
Power Consumption	<3W	Working Humidity	10% ~ 90%
Ingress Protection	IP67	Net Weight	0.50kg
Dimensions (L*W*H)	246 * 85 * 76 (mm)	Gross Weight	0.64kg

Order Information

Camera	Model	Description
8MP Camera	BL-858M48S	8MP Starlight Motorized Lens Facial Recognition Bullet IP Camera

Dimensions (mm)

