

D4F/D4S Series

Indoor 4" Surface / In-ceiling Mount Dome

**AV1115 / AV1115DN
+ MPL33-12**

D4F-AV1115-3312 In-ceiling
D4S-AV1115-3312 Surface
D4F-AV1115DN-3312 In-ceiling
D4S-AV1115DN-3312 Surface

**AV2115 / AV2115DN
+ MPL33-12**

D4F-AV2115-3312 In-ceiling
D4S-AV2115-3312 Surface
D4F-AV2115DN-3312 In-ceiling
D4S-AV2115DN-3312 Surface

**AV3115 / AV3115DN
+ MPL33-12**

D4F-AV3115-3312 In-ceiling
D4S-AV3115-3312 Surface
D4F-AV3115DN-3312 In-ceiling
D4S-AV3115DN-3312 Surface

**AV5115 / AV5115DN
+ MPL33-12**

D4F-AV5115-3312 In-ceiling
D4S-AV5115-3312 Surface
D4F-AV5115DN-3312 In-ceiling
D4S-AV5115DN-L3312 Surface

**AV1115 / AV1115DN
+ MPL4.0**

D4F-AV1115-04 In-ceiling
D4S-AV1115-04 Surface
D4F-AV1115DN-04 In-ceiling
D4S-AV1115DN-04 Surface

**AV2115 / AV2115DN
+ MPL4.0**

D4F-AV2115-04 In-ceiling
D4S-AV2115-04 Surface
D4F-AV2115DN-04 In-ceiling
D4S-AV2115DN-04 Surface



With Casino Mode in 1080p versions

The **D4F/D4S Series** is Designed to House Arecont Vision's **Compact H.264 MegaVideo** Megapixel Cameras with the **MPL33-12** Vari-Focal lens or **MPL4.0** Fixed Focal Lens (1.3MP & 1080p)

Surface Mount or Flush Mount Configurations with **1.3, 1080p, 3 & 5MP** Resolution

Arecont Vision Advantages:

- Easy installation and superior design perfect for indoor application
- Cost Efficiency solution
- 2-axis gimbal for camera positioning
- In-ceiling mount dome and surface mount dome option
- Superior Image Quality
- Casino mode™ on D4F/D4S - AV2115xx-xxxx models (always maintains 30fps)

Made in USA



Model Numbers:

AV1115 / AV1115DN + MPL33-12

- D4F-AV1115-3312 In-ceiling
- D4F-AV1115DN-3312 In-ceiling
- D4S-AV1115-3312 Surface
- D4S-AV1115DN-3312 Surface

AV1115 / AV1115DN + MPL4.0

- D4F-AV1115-04 In-ceiling
- D4F-AV1115DN-04 In-ceiling
- D4S-AV1115-04 Surface
- D4S-AV1115DN-04 Surface

AV2115 / AV2115DN + MPL33-12

- D4F-AV2115-3312 In-ceiling
- D4F-AV2115DN-3312 In-ceiling
- D4S-AV2115-3312 Surface
- D4S-AV2115DN-3312 Surface

AV2115 / AV2115DN + MPL4.0

- D4F-AV2115-04 In-ceiling
- D4F-AV2115DN-04 In-ceiling
- D4S-AV2115-04 Surface
- D4S-AV2115DN-04 Surface

AV3115 / AV3115DN + MPL33-12

- D4F-AV3115-3312 In-ceiling
- D4F-AV3115DN-3312 In-ceiling
- D4S-AV3115-3312 Surface
- D4S-AV3115DN-3312 Surface

AV3115 / AV3115DN + MPL4.0

- D4F-AV3115-04 In-ceiling
- D4F-AV3115DN-04 In-ceiling
- D4S-AV3115-04 Surface
- D4S-AV3115DN-04 Surface

AV5115 / AV5115DN + MPL33-12

- D4F-AV5115-3312 In-ceiling
- D4F-AV5115DN-3312 In-ceiling
- D4S-AV5115-3312 Surface
- D4S-AV5115DN-3312 Surface

AV5115 / AV5115DN + MPL4.0

- D4F-AV5115-04 In-ceiling
- D4F-AV5115DN-04 In-ceiling
- D4S-AV5115-04 Surface
- D4S-AV5115DN-04 Surface

Compatible Lens:

- MPL3312:
 - F1.4, 3.3-12mm, 1/2.5"
 - Horizontal FOV:
- MPL4.0:
 - F1.8, 4mm, 1/2"

| | AV1115 | AV2115 | AV3115 | AV5115 |
|------------------|--------|--------|--------|--------|
| MPL33-12 @ 3.3mm | 61° | 92° | 75° | 95° |
| MPL33-12 @ 12mm | 21° | 31° | 25° | 32° |
| MPL4.0 | 57° | 86° | 74° | 82° |

Compatible Cameras:

- AV1115, AV1115DN, AV2115, AV2115DN
- AV3115, AV3115DN, AV5115, AV5115DN

*Please see specific camera data sheets for imaging & electrical specifications

Environmental:

- Operating temperature -5°C (23°F) to +45°C (113°F)
- Storage temperature: -30°C (-22°F) to +60°C (140°F)
- Humidity 0% to 90% (non condensing)

Mechanical:


- Housing material: Acrylonitrile Butadiene Styrene (ABS) Plastic
- Dome Cover Protection: Acrylic (PMMA)
- Color: Beige
- Mounting Type:
 - D4F (in-ceiling mount)
 - D4S (Surface Mount)

Accessories:

- D4S-WMT : Wall Mount (Fit 3/4" NPT)
- D4S-CMT: Pendant Mount (Fit 3/4" NPT)
- SV-EBA: Electrical Box Adapter

D4F Dome dimension:

- Bubble Cover:
 - Diameter: 4 inch (101 mm)
 - Height: 2 inch (51.7mm)
- Housing:
 - Diameter: 6 inch (156 mm)
 - Height: 4.9 inch (124 mm)
- Weight w/o camera: 0.64 lbs(0.29kg)
- Weight w/ camera and lens 1.16 lbs(0.525kg)

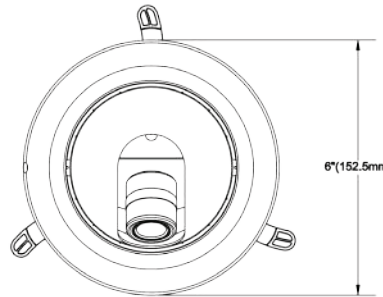

D4S Dome dimension:

- Bubble Cover:
 - Diameter: 4 inch (101.3 mm)
 - Height: 2.9 inch (51.7mm)
- Housing:
 - Diameter: 4.7 inch (118.5 mm)
 - Height: 3.8 inch (95.4 mm)
- Weight w/o camera: 0.47 lbs(0.215kg)
- Weight w/ camera and lens 0.98 lbs(0.445kg)

