



Network

Intercom

TID-600R

2MP Intercom



Key Features

- 1/2.8" 2MP sensor
- 1.6mm fixed lens : HFoV 180°, VFoV 114°
- IR viewable length 5m
- Built-in mic and speaker : 85dB speaker out at 0.5m
- Echo cancellation and noise reduction
- Touchless call, Built-in tamper switch
- SIP 2.0 support
- MicroSD 1slot, PoE/12VDC
- Max. 550mA relay out with 2A 12VDC adapter
- IP65, IK08, NEMA4X

Compatible Accessories (Optional)



SBS-165TM



SBC-165W



SHS-165F

TID-600R

2MP Intercom



Specifications

Video

| | |
|-------------------|---|
| Imaging Device | 1/2.8" CMOS |
| Resolution | 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 |
| Max. Framerate | H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps |
| Min. Illumination | Color: 0.018Lux(F1.6, 1/30sec) BW: 0Lux(IR LED on) |
| Video Out | CVBS: 1.0Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation |

Lens

| | |
|---------------------------|-----------------------------|
| Focal Length (Zoom Ratio) | 1.6mm fixed focal |
| Max. Aperture Ratio | F1.6 |
| Angular Field of View | H: 180° / V: 114° / D: 180° |
| Min. Object Distance | 0.3m (0.98ft) |
| Focus Control | Fixed |

Operational

| | |
|-----------------------------|---|
| Camera Title | Displayed up to 85 characters |
| Day & Night | Auto(ICR) |
| Backlight Compensation | BLC, HLC, WDR, SSSDR |
| Wide Dynamic Range | 150dB |
| Digital Noise Reduction | SSNR V |
| Digital Image Stabilization | Support |
| Defog | Support |
| Motion Detection | 8ea, 8point Polygonal zones |
| Privacy Masking | 32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic |
| Gain Control | Low / Middle / High |
| White Balance | ATW / AWC / Manual / Indoor / Outdoor |
| Electronic Shutter Speed | Minimum / Maximum / Anti flicker (2~1/12,000sec) |
| Analytics | Directional detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Shock detection, Sound classification |
| Alarm I/O | Input 2ea / Output 1ea, Relay out 1ea (12VDC Max. 550mA with 2A adapter) Tampering switch, Touchless call |
| Alarm Triggers | Analytics, Network disconnect, Alarm input |
| Alarm Events | File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover Audio playback |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com.

Hanwha Vision is formerly known as Hanwha Techwin.

TID-600R

| | |
|---|---|
| Audio Streaming | Two-way/one-way selectable, Full duplex, Echo cancellation and noise reduction |
| Audio In | Built-in mic |
| Audio Out | Built-in speaker: 85dB at 0.5m(1.64ft) |
| Light Type | IR LED (850nm) |
| Light Viewable Length | 5m |
| Network | |
| Ethernet | Metal shielded RJ-45(10/100BASE-T) |
| Video Compression | H.265/H.264: Main/Baseline/High, MJPEG |
| Audio Compression | G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz Opus 8/16KHz |
| Smart Codec | Manual(5ea area), WiseStream II |
| Bitrate Control | H.264/H.265: CBR or VBR MJPEG: VBR |
| Streaming | Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles) |
| Protocol | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, SRTP, SIP 2.0(RFC 3261 and companion RFCs) |
| SIP support (VoIP, Peer-to-peer, SIP/PBX integration) | Tested with Cisco, Grandstream, Yealink VoIP phones and Asterisk PBX software |
| Security | HTTPS(SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1X authentication(EAP-TLS, EAP-LEAP), Device certificate(Hanwha Techwin Root CA) |
| Application Programming Interface | ONVIF Profile S SUNAPI(HTTP API) Wisenet open platform |
| General | |
| Webpage Language | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek |
| Edge Storage | Micro SD/SDHC/SDXC 1slot 256GB |
| Memory | 2GB RAM |
| Environmental & Electrical | |
| Operating Temperature / Humidity | -30°C~+55°C(-22°F~+131°F) / 0~95% RH |
| Storage Temperature / Humidity | -50°C~+55°C(-58°F~+131°F) / Less than 95% RH |
| Certification | IP65, IK08, NEMA4X, Safety(UL), EMC(FCC, CE) |
| Input Voltage | PoE(IEEE802.3af, Class3), 12VDC |
| Power Consumption | PoE: Max 12.95W, typical 9.1W 12VDC: Max 17.6W, typical 7W * 12VDC power consumption includes 12VDC/550mA relay out. |
| Mechanical | |
| Color / Material | Dark gray / Aluminum |
| RAL Code | RAL7022 |
| Product Dimensions / Weight | 49(W)x165(H)x48(D)mm(1.93x6.50x1.89") / 490g(1.08lb) |
| Compatible Models | |
| In-ceiling Mount | SHS-165F |
| Tilt Mount | SBS-165TM |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com.

Hanwha Vision is formerly known as Hanwha Techwin.

| | |
|---------------------------|-----------------|
| Skin Cover | SBC-165W |
| DORI (EN62676-4 standard) | |
| Detect (25PPM/ 8PPF) | 20.72m(67.98ft) |
| Observe (63PPM/ 19PPF) | 8.29m(27.20ft) |
| Recognize (125PPM/ 38PPF) | 4.14m(13.58ft) |
| Identify (250PPM/ 76PPF) | 2.07m(6.79ft) |


TID-600R

2MP Intercom



CAD

Unit:mm [inch]

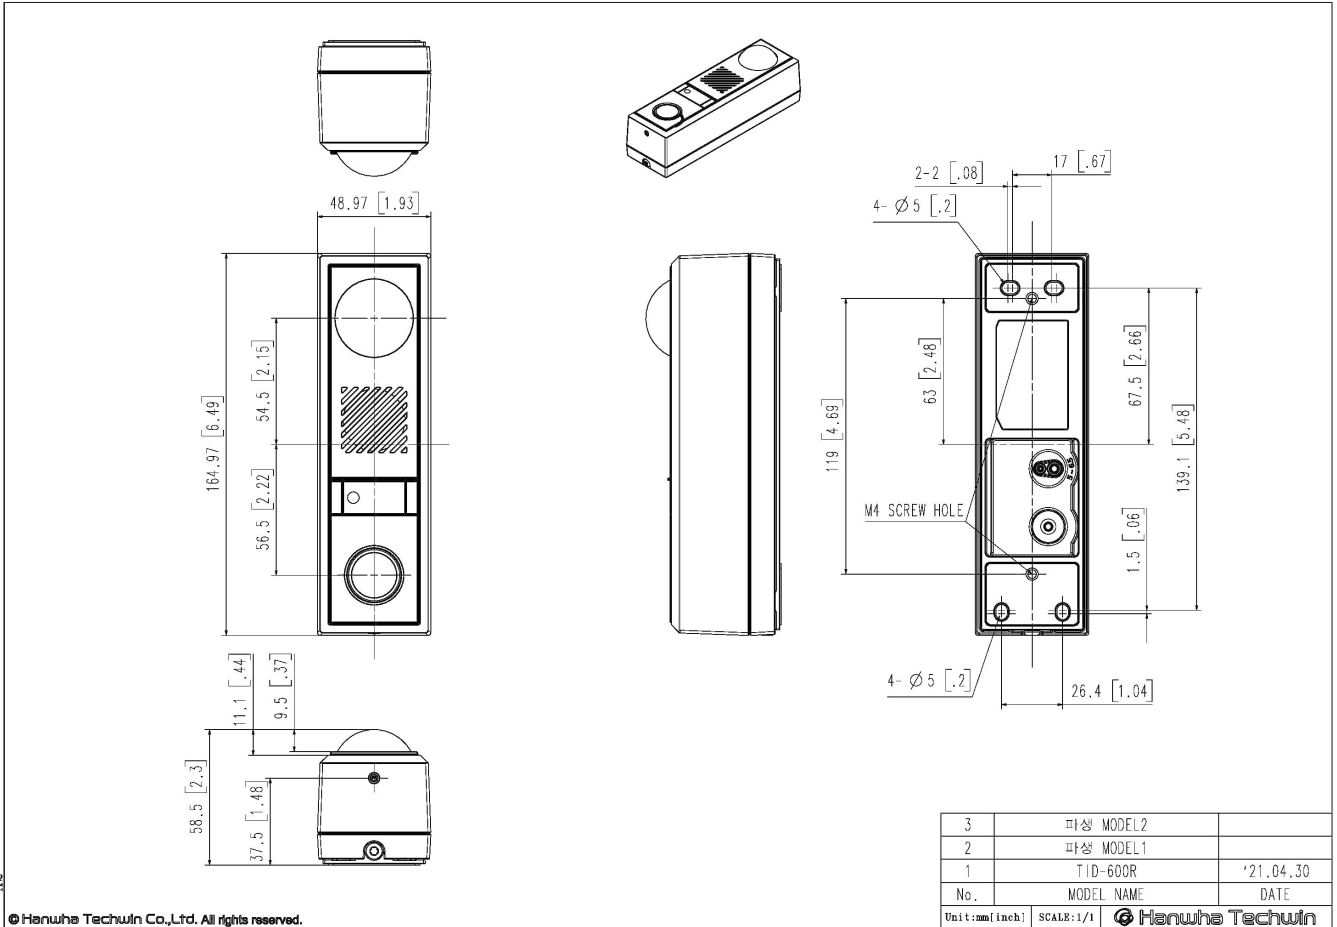

© Hanwha Techwin Co.,Ltd. All rights reserved.