



V-series PTZ AI Camera

SD9368 / SD9384 / SD9394 / SD9387 / SD9367



The V-series PTZ camera delivers clear images in any lighting condition. Capture sharp visuals over long distances with powerful zoom and long-range IR illumination. It features AI-powered Smart Tracking Advanced to automatically follow unusual activities in real time. With Vision Object Analytics, the camera intelligently analyzes moving objects, optimizing auto-focus performance to maintain sharpness and clarity. Seamlessly syncing with nearby cameras, it ensures comprehensive coverage and proactive security, giving users confidence that no detail will be missed. Ideal for airports, city surveillance, and industrial sites.

Features

● Hardware ● Software

<p>2MP / 5MP / 4K Resolution V-series Pan-Tilt-Zoom AI camera</p> 	<p>Up to 40x Optical Zoom Up to 320x with 8x digital zoom</p>
<p>Electronic Image Stabilization Reliable and detailed visuals anytime</p>	<p>Pan Speed up to 450°/sec Capture with precision</p>
<p>Up to 250M IR</p> 	<p>120 dB WDR Pro</p> 
<p>Rugged Protection IP66, IK10 and NEMA 4X</p> 	<p>Interoperability with Nearby Camera Spot Camera Detects, PTZ Camera Follows</p>
<p>Smarter Patrol with AI With multiple detection rules</p> 	<p>Vision Object Analytic Identify people, vehicles and attributes</p> 
<p>Deep Search Available with supported platform</p> 	<p>Trend-Micro™ IoT Security Defend and quarantine vulnerability protection</p> 



Exceptional Imaging Performance for Every Environment

The V-series PTZ cameras, powered by Sony Starvis II sensors, deliver clear imaging and intelligent tracking in any scenario. The compact model is lightweight and lower power consumption, reducing installation complexity and cost. The larger unit ensures long-range IR for total visibility in darkness. Built to endure with IK10, IP66, and NEMA 4X protection, both models guarantee dependable surveillance in outdoor spaces and demanding indoor environments.



Interoperability with Nearby Camera

No manual intervention needed. Connect nearby cameras, like panoramic models, to PTZ cameras for seamless event detection and automatic zoom, ensuring precise monitoring without a video management system.



Smarter Patrol with AI

Secure wide coverage with Smart Tracking Advanced and PTZ patrol. Set multiple VCA rules to identify abnormal behavior, protect sensitive zones, and track suspicious activity in patrol ranges. Run simultaneous VCA events for enhanced details and efficient surveillance. By supporting Vision Object Analytics, the AI-powered camera accurately identifies moving objects, enhancing the camera's auto-focus performance and providing users with clearer, sharper images.



Perimeter intrusion



Fence jump



Loitering in critical location



Face Detect



Complete Video Security with VIVOTEK Solution

Access and manage all devices and accounts through a single platform, providing accurate event monitoring and intuitive security system operation video investigation no matter where you are.




Intuitive PTZ control with joystick, clicks and zoom to focus area

Effortlessly adjust the field of view and zoom ratio with the joystick, click/scroll, or draw the focus area. Experience seamless management on a single platform.



Direct control for presets switching

Easily manage PTZ preset positions through the VMS or NVR without opening a separate browser.

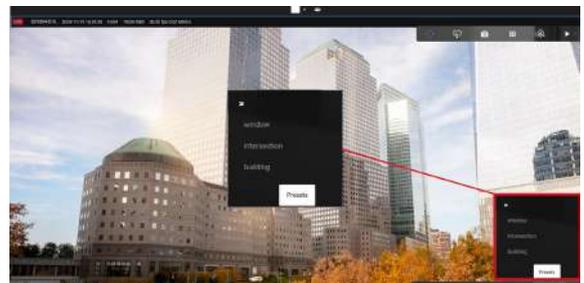

Generate case report and export video in organized

Turn Deep Search findings into organized clips and streamlined reports with Case Vault, simplifying case management.




Unified AI PTZ Management on Milestone and Genetec


Optimize your Milestone XProtect or Genetec Security Center with VIVOTEK's PTZ AI cameras, featuring PTZ control, VIVOTEK joystick integration (AJ-001), Smart Tracking Advanced, and Deep Search by attributes for instant evidence retrieval.



Milestone XProtect

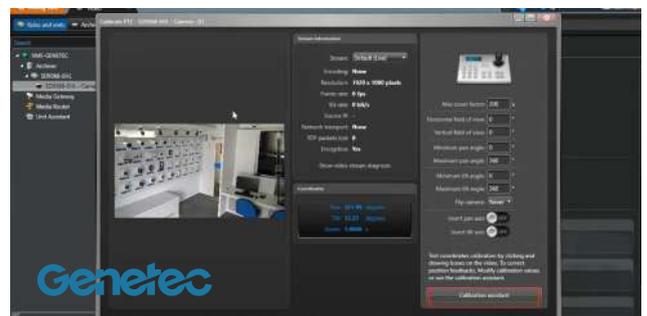

Genetec Security Center

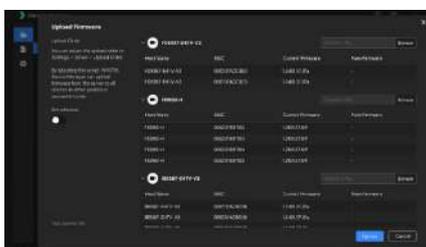

VIVOTEK Device Manager – Batch Configuration

Device Manager saves PTZ preset positions into the camera configuration file, enabling backup and restore for multiple PTZ cameras. With our batch configuration, IP allocation, HTTPS certificates, and firmware updates have never been easier.



Ordering Information

Models	SD9394-EHL	SD9384-EHL	SD9387-EHL	SD9368-EHL	SD9367-EHL
					
Resolution	4K	5MP		2MP	
Max. Frame Rate	30 fps @ 3840x2160	30 fps @ 2560x1920	30 fps @ 2560x1920	60 fps @ 1920x1080	60 fps @ 1920x1080
Optical Zoom	32x	30x	30x	40x	40x
Aperture	F1.4~F4.9	F1.3~F4.6	F1.3 ~ F4.6	F1.6~F4.95	F1.6~4.95
Iris Type	P-Iris	DC-Iris	DC-Iris	DC-Iris	DC-Iris
IR Range	250M	200M	X	250M	X
Power Input	IEEE 802.3 bt	IEEE 802.3 bt	IEEE 802.3 at	IEEE 802.3 bt	IEEE 802.3 at
Dimensions/Weight	Ø256 x 336 mm / 7.3kg	Ø256 x 336 mm / 7.1kg	Ø174x 276 mm / 4.5kg	Ø256 x 336 mm / 7.1kg	Ø174x 276 mm / 4.5kg
Included Accessories	AM-21P	AM-220	X	AM-220	X

Accessories

Wall Mount Bracket				Mounting Adapter
				
AM-220	AM-21P	AM-10I	AC-21A	AM-529

Joystick	Cabinet	Industrial PoE Injector	Industrial PoE Switch	
				
AJ-001	AT-CAS-001	AW-IHB-0100	AW-IHB-1040 8 ports Lite Managed PoE Switch	AW-IHB-1040 12 ports L2+ Managed PoE Switch

Recommend Solution

