


ENR-221P

9-Channel 2-Bay Desktop Standalone NVR with 8-port PoE Connectors



- Maximum Number of Video Devices: 9
- Built-in PoE Connectors (8 ports)
- Web Client, Mobile Client
- Event trigger, response and notification
- Video export formats: RAW, AVI

▶ ****Solution Diagram****

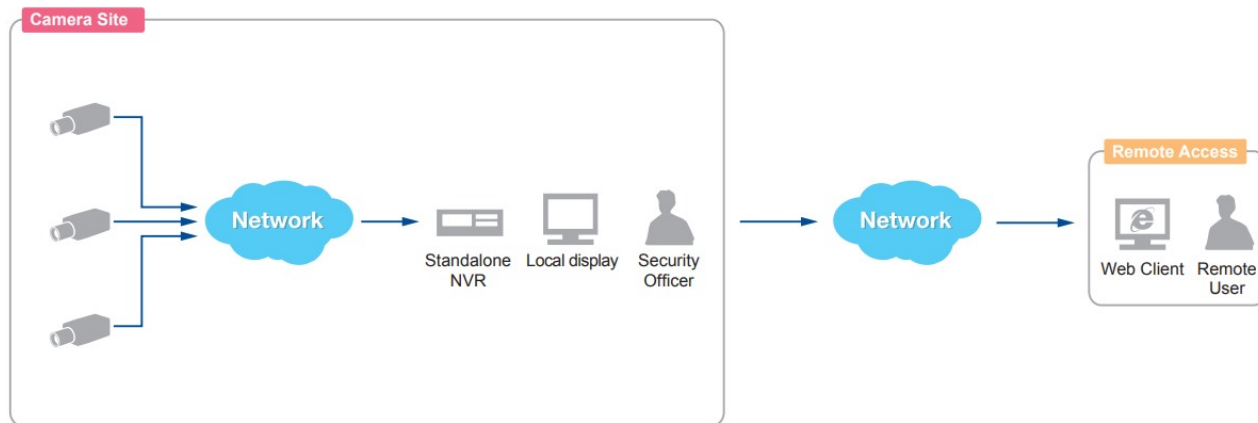

Remote User: Administrator / Supervisor / Manager / Security Officer

▶ **Specifications**

Product Profile

Product Type	Standalone NVR
Maximum Resolution	Support all ACTi cameras in all resolutions
Maximum Number of Video Devices	9

Maximum Number of POS devices	9
Maximum Number of Access Control and Network I/O devices	9
Maximum Number of Clients	Local: 1, Remote: 2
Supported Screen Resolution	HDMI: 1080p, 4K2K

Hardware

System Architecture	Embedded SoC-based (ARM platform)
CPU	Hi3536
RAM	4GB

License

License required	No
Free License	9

Live View

Display Layout Mode	Custom dynamic layouts by grid merging
Fisheye Dewarping	Local: Yes*, Remote: Yes
Local Live View performance	Please check "Standalone NVR Performance Validator" (http://www.acti.com/SANVRPerformance)
Digital Zoom	Yes (available for remote web client)
Event Status	Display event status upon alarm or upon connection loss or recovery between server and client
Instant Playback	Instant Playback in live view window

Map

e-Map	Yes*
Google Map	Yes*

PTZ

PTZ Control	PTZ Control, Speed Control, 32 preset points
-------------	--

Backup

Automatic Recording Backup	Yes, Pre-scheduled recording backups using the Backup Server.
----------------------------	---

Video

Compression	H.265, H.264, MJPEG
Text Overlay	Yes

Audio

Audio Type	2-way, Line-in, Line-out
------------	--------------------------

Network

Network Protocol & Service	IPv4/v6, TCP, UDP, DHCP (Server/Client), HTTP, HTTPS, DNS, DDNS, NTP, RTP, RTSP, SMTP, ICMP, ARP, UPnP, iSCSI, Samba, NFS, SNMP
----------------------------	---

Ethernet Port	Total ports: 10 port(s) (WAN) Non-PoE: 2 port(s), Ethernet (1000 Base-T), RJ-45 connector (LAN) PoE: 8 port(s), Ethernet (10/100 Base-T), RJ-45 connector
---------------	---

Recording

Scheduled Recording	Yes
Event Recording	Yes
Manual Recording	Yes
Event Speed-up Recording	Yes
Dual Stream Management	Yes
Maximum Recording Throughput	300 Mbps

Search & Playback

Playback Control	Continuous forward and backward playback with speeds 0.125x/0.25x/0.5x/1x/2x/4x/8x/16x, pause, stop
Synchronized Playback	9 channels
Recording Search	Search video recordings by time, events, channels and bookmarks*
Video Export	RAW, AVI

Event

Event Trigger	[NVR]: Disk full, Disk not found, System booted successfully, Expiration of user accounts, Expiration of specific event schedule, Event action failed, S.M.A.R.T test failed. [Video Device]: Video motion detection, External device through digital input, Sound detection, Video loss, Video Recovery, Network loss and recovery, Intelligent event detection (ACTi IVS Cameras). [Extended Device]: Point-of-sale (POS) status, Network I/O status, Access Control status
Event Response	Play alert sound, Activate external device through digital output, E-mail notification with snapshots, Go to PTZ preset point or preset tour, Command other devices, Push notification

System

Permission control	Unlimited number of users, Active Directory*, Customizable permissions for user groups*, Account lockout*, Automatic logout after idle*
Client PC Operating System	Windows 10, Windows 8.1, Windows 7 SP1
Server Operating System	Embedded Linux
Mobile Client Program	Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, Event/time based search and playback, Supported device(s) iOS, Android device
USB	2-Port USB 2.0, 1-Port USB 3.0
Language	Multi-Language

Integration

Unified Solution	Fully compatible with ACTi Cameras, Video Encoders, Central Management System*, TV Wall Server*, Intelligent video surveillance software
ONVIF Compliant	Yes, Profile S

Web Browser	IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.)
Auto Firmware Upgrade	Yes
Third-party Integration	Point of Sale (POS), Parking Management Station (PMS), Access Control, Network I/O

Storage

Storage Bay	SATA, Max. 2 Disk(s) (without storage disks)
HDD Size	3.5"
Maximum Recording Capacity	14TB x2
RAID Level	No
Supported Storage	Video Recording: SATA disk, iSCSI Video Exporting: Remote PC (local drives, USB), Samba NFS

Interface


Digital Input/Output	2/2
External Storage Interface	iSCSI
Local Access	USB keyboard & mouse
Local Display Interface	HDMI x 1,

General


PoE Output	Maximum 30 Watts per port
PoE Power Budget	Maximum 140 W
Power Source	DC 48V
Weight	1679g (3.702lb)
Bundled Accessories	Power Adapter
Fan	Yes
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Remote Access	Web Client, Mobile Client
Approvals	CE, FCC, UL (for built-in power adapter)
Warranty	3 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

* To be available through future firmware upgrade

► Photo Indication

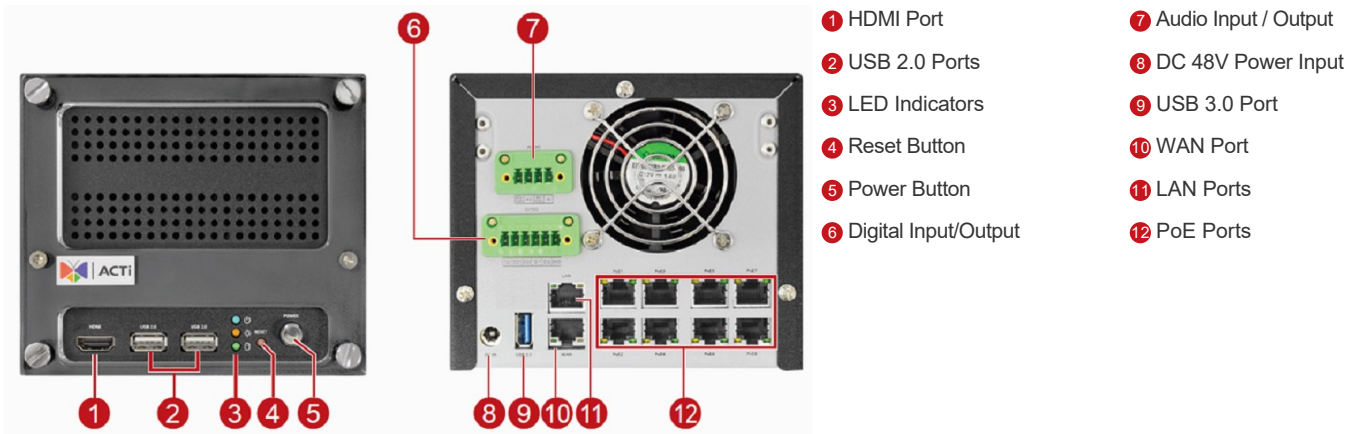

► Dimension Diagram

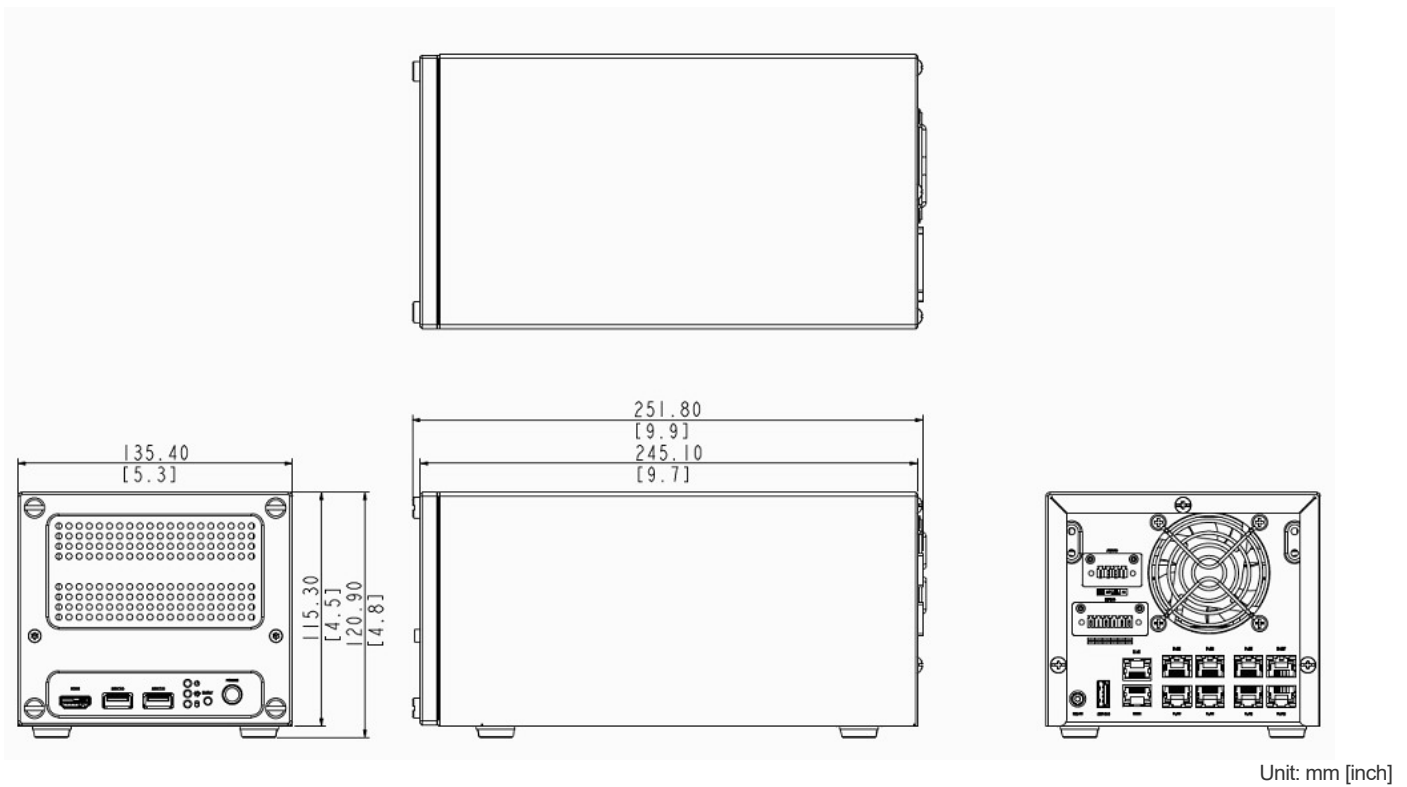









▶ Ordering Information

LPOS1000


The license is for POS register to work on . Price listed is for single device add-on license.

▶ Related Products


Network & Storage Peripherals - Hard Disk

PHDD-2200		WD WD1005FBYZ 1TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for ENR-0x0P, ENR-110, ENR-120, ENR-130, ENR-22x, ENR-22xP, GNR-310, GNR-320, INR-100, INR-340, INR-430, INR-440, INR-450, INR-460)
PHDD-2301		HGST ULTRASTAR 7K6000 2TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR- 0x0P, ENR-22x, ENR-22xP)
PHDD-2501		HGST ULTRASTAR 7K6000 4TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR-0x0P, ENR-22x, ENR-22xP)
PHDD-2702		WD Ultrastar 6TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2900		WD WD8002FRYZ 8 TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for GNR-310, GNR-320, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460)
PHDD-2A00		WD WD101KRYZ 10TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache (for ENR-xxx, ENR-xxxP, GNR-330, GNR-410, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460, INR-470)
PHDD-2B01		HGST ULTRASTAR 7K6000 12TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2E01		HGST ULTRASTAR 7K6000 14TB 3.5" Hard Disk Drive, 7200 RPM 512MB Cache


Network & Storage Peripherals - Network IO Module

PIOB-0100		Advantech ADAM-6060 6 Digital Input and 6 Digital Output Network I/O Module
-----------	---	---

Controllers - Joystick

PJSK-0100		Apem 100-550-BLK-RF Joystick for PTZ Control (for all ENR, INR, and MNR Series)
-----------	---	---

Audio Devices - Microphone

PMIC-0101		YLD-122 Active Microphone (for ENR)
-----------	---	-------------------------------------