




## 14 dBi WiFi 6 AX1200 Outdoor PoE Preconfigured Point-to-Point Bridge Kit

TEW-940APBO2K (v1.0R)

- 5GHz WiFi 6 AX1200 point-to-point bridge kit
- Includes two preconfigured TEW-940APBO access points
- 1 x Gigabit PoE (in) port, and 1 x Gigabit port each
- 14 dBi directional antennas
- Supports Access Point, Client Bridge, and Repeater modes
- IP55 outdoor weather rated housing
- Proprietary PoE power adapters included
- Remote cloud management with TRENDnet Hive™ (Additional fee applies)
- NDAA / TAA compliant (U.S. and Canada only)

TRENDnet's 14 dBi WiFi 6 AX1200 Outdoor PoE Preconfigured Point-to-Point Bridge Kit, model TEW-940APBO2K, provides reliable, long-range wireless AX1200 point-to-point connectivity. This preconfigured 5GHz outdoor WiFi 6 bridge kit provides installers the simplest way to create a long-distance wireless point-to-point bridge. The outdoor WiFi 6 bridge kit conveniently links two locations together with WiFi 6 AX1200 speed and performance. Faster speeds are possible with this outdoor point-to-point WiFi 6 bridge kit with OFDMA and MU-MIMO technologies. MU-MIMO technology processes multiple data streams simultaneously, increasing real-time WiFi performance on the outdoor wireless access point when multiple devices access the network. The IP55 rated housing is designed for outdoor environments, and includes wall and pole mounting hardware.

Easily manage and configure TRENDnet's 14 dBi WiFi 6 AX1200 Outdoor Directional PoE Access Point remotely by updating the access point to the latest firmware for access to TRENDnet Hive™. TRENDnet Hive is a network cloud manager that reduces management time and cost. This cloud managed access point requires no additional hardware, server, or personal cloud with TRENDnet's reliable cloud service.

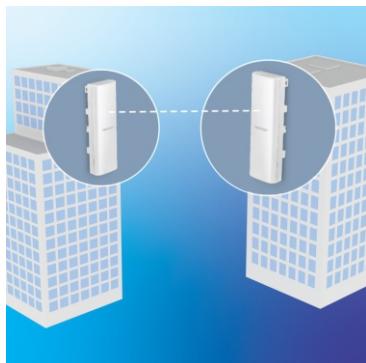

### Preconfigured Point-to-Point Bridge

#### Bridge

Reduce installation and setup time with this preconfigured and pre-encrypted long-range outdoor WiFi bridge kit.



### PoE Power Adapters

Included proprietary PoE power adapters provide power and data over a single Ethernet cable with a maximum distance of 60m (197 ft.).

### Outdoor Ready

Built for outdoor environments with an IP55 weather rating, and an operating temperature range of -20° – 60° C (-4° – 140° F).

## NETWORKING SOLUTION

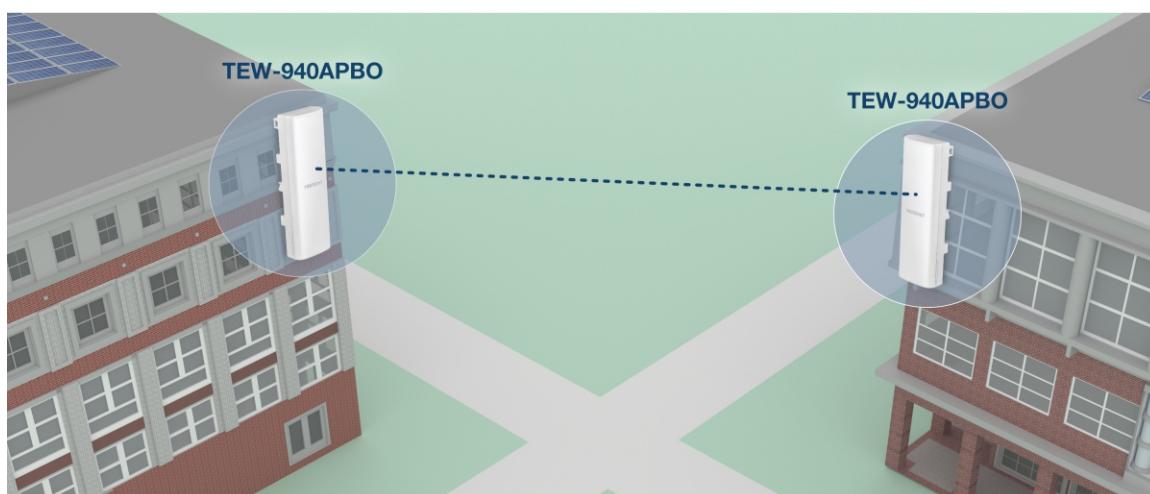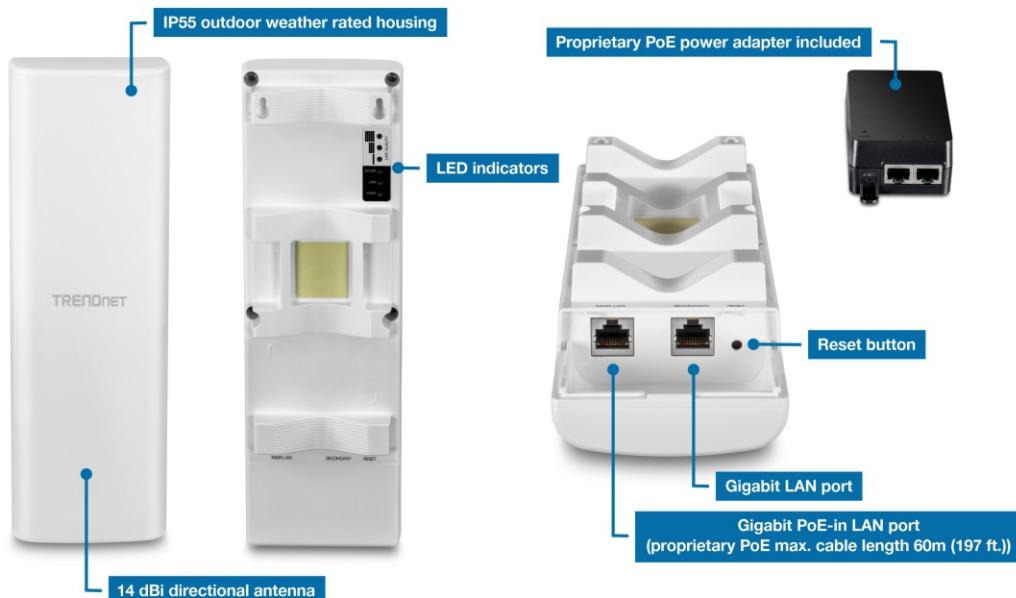

## FEATURES



### Preconfigured Kit

Reduce installation and setup time with this preconfigured and pre-encrypted outdoor long-range WiFi 6 access points



### WiFi 6 AX1200 (5GHz)

Compliant with 802.11ax/n/ac 5GHz technology with data rates up to 1.2Gbps\*



### Outdoor Rated

Outdoor WiFi 6 bridge kit features durable enclosure with an IP55 outdoor weather rating



### Directional Antennas

Built-in 14 dBi directional antennas



### PoE Power Adapters

Proprietary PoE power adapters included



### Mounting Hardware

Pole and wall mount hardware included



### LED Indicators

LEDs on the outdoor WiFi 6 bridge kit convey connection quality for ease of installation



### Hive Enabled

Remotely manage, configure, and diagnose this WiFi 6 access point via TRENDnet's cloud service (Additional fee applies)

## SPECIFICATIONS

### Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.1d
- IEEE 802.1Q
- IEEE 802.1X
- IEEE 802.11a
- IEEE 802.11k
- IEEE 802.11n (5GHz: up to 300Mbps)\*
- IEEE 802.11ac (5GHz: up to 867Mbps)\*
- IEEE 802.11ax (5GHz: up to 1201Mbps)\*

### Hardware Interface

- 1 x Gigabit PoE-in LAN port (proprietary PoE max. cable length 60m (197 ft.))
- 1 x Gigabit LAN port
- LED indicators
- Reset button

### Operation Modes

- Access Point
- Client Bridge
- Repeater

### Weight

- 598g (21.09 oz.) per access point

### Access Control

- Wireless encryption: OWE (Opportunistic Wireless Encryption), WPA/WPA2/ WPA3-RADIUS (Enterprise), WPA-PSK/ WPA2-PSK/WPA3-SAE (Personal)
- MAC filter (max entries: 32)
- Maximum client limit
- Client isolation/separate stations

### QoS

- WMM
- Bandwidth control per SSID

### SSID

- Up to 8 SSIDs

### Frequency

- 5.150GHz – 5.250GHz, 5.725GHz – 5.850GHz

### Wireless Channels

- 5 GHz: 36, 40, 44, 48, 149, 153, 157, 161, 165

### Modulation

- BPSK/QPSK/16-QAM/64-QAM/256-QAM/1024-QAM for OFDM/OFDMA

### Antenna Gain

- 14 dBi internal directional patch antenna

### Distance

- Up to 1km\*\*

### Wireless Output Power

- 802.11a: 23 dBm (max.)
- 802.11n: 22 dBm (max.)
- 802.11ac: 22 dBm (max.)
- 802.11ax: 22 dBm (max.)

### Receiving Sensitivity (per chain)

- 802.11a: -71 dBm (typical) @ 54Mbps
- 802.11n: -66 dBm (typical) @ 300Mbps
- 802.11ac: -55 dBm (typical) @ 867Mbps
- 802.11ax: -54 dBm (typical) @ 1201Mbps

### Power

- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 54V DC, 0.6A proprietary/passive PoE injector
- Max. Consumption: 10.1W

### Operating Temperature

- -20° – 60° C (-4° – 140° F)

### Operating Humidity

- Max. 90% non-condensing

### Certifications

- FCC

**Features**

- 802.11ax WiFi 6 support
- IP55 rated housing
- MU-MIMO
- Band steering
- Airtime fairness
- 802.1Q VLAN assignment per SSID
- IPv6 support
- LEDs on/off
- 802.11k intelligent radio resource management
- RSSI Threshold (client signal strength and connectivity control)
- LLDP
- Bonjour/UPnP

**Hive Cloud Management**

- Configure, monitor, and manage through the TRENDnet Hive Cloud Management Portal remotely via PC or Mac web browser
- Multi-device management
- Provisioning through scheduled batch or configuration updates for multiple switches
- Event/hardware network monitoring (CPU/memory utilization)
- Configure features such as IP address settings, WiFi settings, operation modes, and LED control through cloud management

**Management/Monitoring**

- Web based management (HTTP/HTTPS)
- Command Line Interface (SSH)
- SNMP v2c/v3
- Spanning Tree Protocol (STP)
- Event logging
- Ping test
- Traceroute
- Performance throughput test
- Schedule WiFi radio enable/disable
- Ping watchdog/gateway connection monitor
- Reboot & scheduled automatic reboot
- Channel utilization scan/AP detection

**Dimensions**

- 82 x 257 x 50mm (7.3 x 3.9 x 1.4 in.) per access point

**Package Contents**


- 2 x TEW-940APBO
- Quick Installation Guide
- 2 x Proprietary/Passive PoE injectors (54V DC, 0.6A)
- Mounting hardware

**Warranty**


- 3 year

**Antenna Pattern**

- 5G Antenna 1

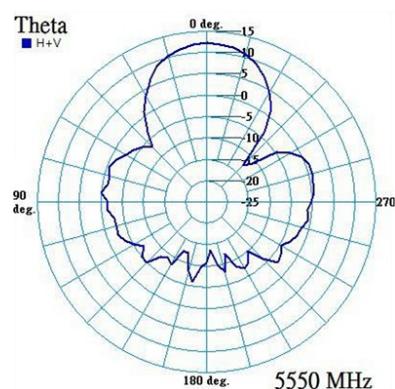

- 5G Antenna 2

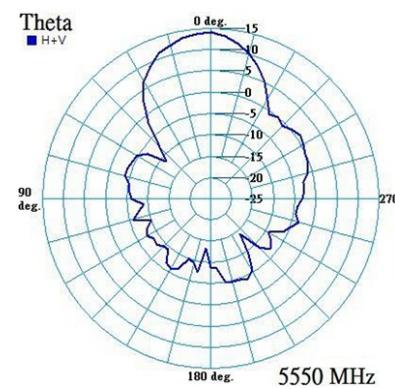**Disclaimer:**

\* Effective wireless coverage may vary depending on the wireless device's output power, antenna gain, antenna alignment, receiving sensitivity, and radio interference. Additionally, environmental factors such as weather conditions, physical obstacles, and other considerations may affect performance. For optimal results, we recommended consulting a professional installer for site survey, safety precautions, and proper installation.

**\*\* Distance Disclaimer**

\*\* The distance listed in the specification is based on internal wireless connectivity between two TEW-940APBO units with consideration to acceptable data transmission rates performance throughput. Actual achievable connectivity and performance throughput may vary based on environmental factors in the installed locations.

\*\*\* Hive cloud management requires firmware 1.0.4.07 or above.

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.