

DC-D4517RXP-W 2.8mm

H.265 5MP PoE Extender IR Dome Camera



5MP (2592x1944) resolution
IR LED (Distance : 20 m / 65.6 ft)
Fixed-focal lens

PoE, IEEE 802.3at(Class 4), Built-in PoE Extender
Day and night (ICR)
True wide dynamic range (WDR)

Easy installation with DirectIP NVR
H.265 and Intelligent Codec
White Base

SPECIFICATIONS


Video	
Image Sensor	1/2.8" CMOS
Max. Resolution	2592 x 1944
Scanning Mode	Progressive Scan
Lens Type	Fixed-focal
Focal Length	2.8mm
Aperture	F2.0
Iris Control	Fixed Iris
Angular Field of View	4:3 mode : 104.8o (H) 76.9o(V) 130o(D) 16:9 mode : 104.8o (H) 57.2o(V) 123o(D)
Min. Illumination	COLOR : 0.15 lux @ F2.0 B/W : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	Yes (ICR)
IR Distance (LEDs)	20m / 65.6ft (4 ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	BLC
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone
Video Out	-
Pan/Tilt/Rotate	
Pan Range	-170° ~ 170°
Tilt Range	-5° ~ 67.5°
Rotate Range	-109° ~ 109°
Network	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Yes
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	-
Two-way Audio	-
IP Camera Protocol	DirectIP 2.0
Max. Frame Rate	4:3 mode : 30ips : 2592 x 1944(WDR) 16:9 mode : 30ips : 2592 x 1456(WDR)
Supported Resolution	4:3 : 2592x1944, 1920x1440, 1280x960x 640x480 16:9 : 2592x1456, 1920x1080, 1280x720, 640x360
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNT, SMTP, FEN, mDNS, uPNS, SNMPv2
Security	Digest authentication, Password Protection, User access log, IP Filtering, IEEE802.1x(EAP-TLS), Chained Fingerprint, SSL Encryption, HTTPS Encryption
Ethernet	1 RJ45 (10/100BASE-T), 1 Additional RJ45 (10/100BASE-T) for PoE Extender
Recording Session Buffer (NLTRec)	Yes (Up to 60MB)
Edge Storage	-
Alarm and Event	
Trigger Event	Motion Detection, Tampering, Trip Zone
Event Notification	Remote S/W, Email (with Image)
Audio Alarm	-
Audio In / Out	-
Alarm In / Out	-
Environmental	
Vandal Proof Casing	-
Outdoor Ready	-
Operating Temperature	-10°C ~ +50°C (+14°F ~ +122°F) *Starting up at above 0°C (32°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Source	PoE, IEEE 802.3at(Class 4)
Power Consumption	PoE, IEEE 802.3at(Class 4), 25.5W (DC OUT : 42.5-57V=, 0.3A MAX)
Approval	FCC, CE, KC
Mechanical	
Dimensions	Ø110 x 88mm(Ø4.33" x 3.46")
Weight	0.22kg(0.48lb)




PRODUCT IMAGE



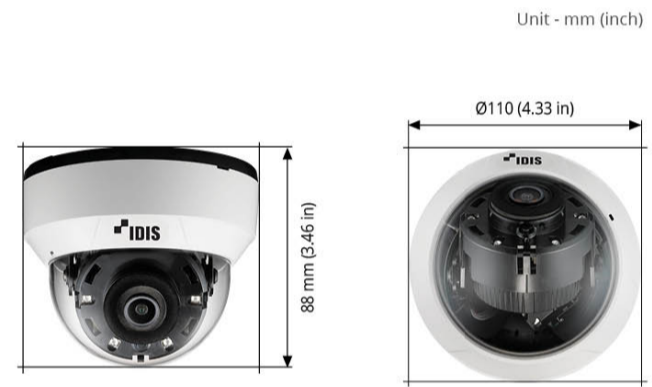

DIMENSIONS

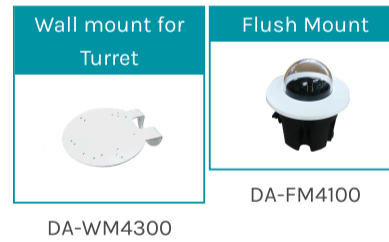

ACCESSORIES (OPTIONAL)



ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-D4517RXP-W 2.8mm	WALL	 WALL Model: DA-WM4300
	ETC	 ETC Model: DA-FM4100