

# DC-T4218WRA 4.0mm

## H.265 2MP AI Bullet Camera (LightMaster NIR)




2MP (1920 x 1080) resolution  
 IDIS Deep-Learning Analytics (IDLA)  
 IR LED (30 m / 98.4 ft (4 ea))  
 NIR Sensor  
 Day and night (ICR)

True wide dynamic range (WDR)  
 Easy installation with DirectIP NVR  
 H.265 and Intelligent Codec  
 PoE (IEEE 802.3af Class 3)  
 IK10, IP67

Alarm in / out  
 Audio in / out  
 micro SD/SDHC/SDXC

### SPECIFICATIONS

Video	
Image Sensor	1/2.8" CMOS
Max. Resolution	1920 x 1080
Scanning Mode	Progressive Scan
Lens Type	Fixed-focal
Focal Length	4.0mm
Aperture	F1.6
Iris Control	Fixed Iris
Angular Field of View	87.5o(H),44.4o(V),104.9o(D)
Min. Illumination	COLOR : 0.1 lux @ F1.6 B/W : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 - 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	Yes (ICR)
IR Distance (LEDs)	30 m / 98.4 ft (4 ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	-
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Object Metadata: Human, Vehicle, Face IDLA: Object Detection, Intrusion, Loitering, Line Crossing, Face Detection ETC: Video Motion Detection, Active Tampering Alarm
Video Out	-
Network	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Yes
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0
Max. Frame Rate	60ips : 1920 x 1080 30ips : 1920 x 1080(WDR)
Supported Resolution	1920x1080, 1280x720, 640x360, 352x240
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SMTP, FEN, mDNS, Upnp, SNMPv2
Security	Digest authentication, Password Protection, User access log, IP Filtering, IEEE802.1x(EAP-TLS), Chained Fingerprint, SSL Encryption, HTTPS Encryption
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLTSec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
Alarm and Event	
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Object Detection, Intrusion, Loitering, Line Crossing, Face Detection
Event Notification	Remote S/W, Email (with Image)
Audio Alarm	Yes
Audio In / Out	1 / 1
Alarm In / Out	1 / 1
Environmental	
Vandal Proof Casing	IK10
Outdoor Ready	IP67
Operating Temperature	-30°C ~ +55°C (-22°F ~ +131°F) *Starting up at above -20°C (-4°F)
Operating Humidity	0% - 90%
Electrical	
Power Source	PoE IEEE 802.3af (Class 3)
Power Consumption	PoE, IEEE 802.3af (Class 3), 8.2W
Approval	FCC, CE, KC
Mechanical	
Dimensions	81.5mm x 75mm x 200.5mm (3.21" x 2.95" x 7.89")
Weight	0.75kg (1.65 lb)

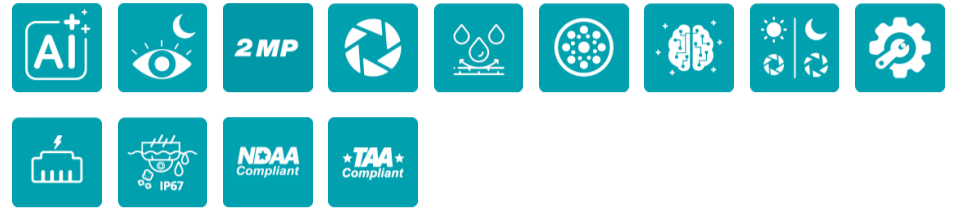

### PRODUCT IMAGE




















### DIMENSIONS



### ACCESSORIES (OPTIONAL)

Junction Box	Junction Box	Pole Mount	Corner Mount
DA-JB4150	DA-JB2400	DA-LM2000	DA-RM2000

# ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION	
DC-T4218WRA 4.0mm	WALL	  Model: DA-JB4150	
		or	
	POLE	  Model: DA-JB2400	
		  Model: DA-LM2000	
		  Model: DA-JB2400	
		or	
		  Model: DA-JB4150	
		  Model: DA-LM2000	
		CORNER	  Model: DA-JB4150
			  Model: DA-RM2000
	or		
	  Model: DA-RM2000		
  Model: DA-JB2400			