

DC-T4517WRXP 6.2mm

H.265 5MP PoE Extender Bullet Camera



5MP (2592x1944) resolution
IR LED (Distance : 20 m / 65.6 ft)
Fixed-focal lens

PoE, IEEE 802.3at(Class 4)
Day and night (ICR)
True wide dynamic range (WDR)

Easy installation with DirectIP NVR
H.265 and Intelligent Codec
Built-in PoE Extender

SPECIFICATIONS

Video	
Image Sensor	1/2.8
Max. Resolution	2592 x 1944
Scanning Mode	Progressive Scan
Lens Type	Fixed-focal
Focal Length	6.2mm
Aperture	F1.6
Iris Control	Fixed Iris
Angular Field of View	49.9o(H) 36.7o(V) 64o(D)
Min. Illumination	COLOR : 0.15 lux @ F1.6, B/W : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	Yes (ICR)
IR Distance (LEDs)	20 m / 65.6 ft (2 ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	BLC
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone
Video Out	-
Network	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Yes
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	-
Two-way Audio	-
IP Camera Protocol	DirectIP 2.0
Max. Frame Rate	4:3 mode : 30ips : 2592 x 1944(WDR), 16:9 mode : 30ips : 2592 x 1456(WDR)
Supported Resolution	4:3 : 2592x1944, 1920x1440, 1280x960x 640x480, 16:9 : 2592x1456, 1920x1080, 1280x720, 640x360
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SMTP, FEN, mDNS, Upnp, SNMPv2
Security	SSL Encryption, Multi-user Authority, IEEE 802.1x, IP Filtering, HTTPS
Ethernet	1 RJ45 (10/100BASE-T), 1 Additional RJ45 (10/100BASE-T) for PoE Extender
Recording Session Buffer (NLSrec)	Yes (Up to 60MB)
Edge Storage	-
Alarm and Event	
Trigger Event	Motion Detection, Tampering, Trip Zone
Event Notification	Remote S/W, Email (with Image)
Audio Alarm	-
Audio In / Out	-
Alarm In / Out	-
Environmental	
Vandal Proof Casing	IK10
Outdoor Ready	IP66
Operating Temperature	-20°C ~ 55°C (-4°F ~ 131°F), Starting up at above 0°C (32°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Source	PoE, IEEE 802.3at(Class 4)
Power Consumption	PoE, IEEE 802.3at(Class 4), 25.5W, (DC OUT : 42.5-57V=, 0.3A MAX)
Approval	FCC, CE, KC
Mechanical	
Dimensions	70mm X 65mm X 197.5mm (2.76" X 2.56" X 7.78")
Weight	0.44kg (0.97lb)




PRODUCT IMAGE



DIMENSIONS



ACCESSORIES (OPTIONAL)

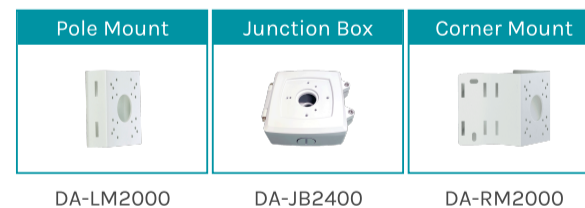

ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-T4517WRXP 6.2mm	WALL	 WALL Model: DA-JB2400
	POLE	 POLE Model: DA-LM2000
		 POLE Model: DA-JB2400
	CORNER	 CORNER Model: DA-RM2000
		 CORNER Model: DA-JB2400