


INR-460

200-Channel RAID Rackmount Standalone NVR



- Rack Space: 2U
- Hardware RAID 0, 1, 5, 10, (RAID 5: support up to 100 channels)
- Maximum Number of Video Devices: 200
- Free License: 64 (64 channels for ACTi and 1 channel for third-party video device)
- Event trigger, response and notification
- Workstation, Web Client, Mobile Client
- Video export formats: RAW, AVI, EXE
- Location-based management with e-Map
- Non-ACTi camera support via licensed Camera Device Pack

► Solution Diagram

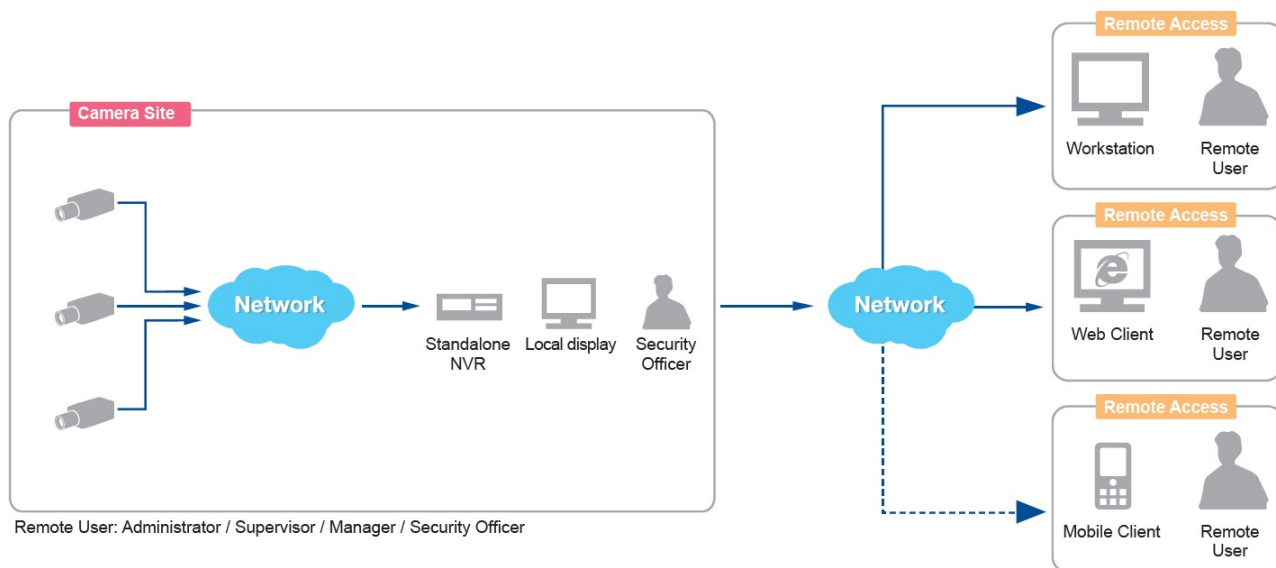

► Specifications

Device

Product Type	Standalone NVR
Maximum Resolution	Support all ACTi cameras in all resolutions
Maximum Number of Video Devices	200
Maximum Number of POS devices	200 (requires additional license)
Maximum Number of Access Control and Network I/O devices	200 (requires additional license)
Maximum Number of Clients	Local: 1, Remote: 5

Hardware

CPU	Intel Core i7-4770S
RAM	8GB

License

License required	Yes
Free License	64 (64 channels for ACTi and 1 channel for third-party video device)

Live View

Display Layout Mode	Local:1, 3, 4, 5, 6, 8, 9, 10, 12, 16 Remote:1, 3, 4, 5, 6, 8, 9, 10, 12, 16, 18, 24, 25, 36, 48, 49, 64, Custom
Fisheye Dewarping	Yes
Local Live View performance	Please check "Standalone NVR Performance Validator" (http://www.acti.com/SANVRPerformance)
Digital Zoom	Yes
Event Status	Display event status upon alarm or upon connection loss or recovery between server and client or when the allocated disk space is full
Instant Playback	Instant Playback in live view window
Embedded websites in Live View	Display and connect to pre-configured embedded website

Map

e-Map	Yes
Google Map	Yes
Layout	Area maps with camera icons, small live view windows, hyperlinked
Setup	e-Map image upload, Google maps settings and preset management, camera positioning, vision angle and pointed direction of camera, view positioning, source positioning, extended devices for Point-of-sale (POS), Access Control, Network I/O, Car Park
PTZ Mode	Mouse PTZ mode to control e-Map video streams

PTZ

PTZ Control	PTZ Control, Speed Control, 32 preset points
-------------	--

Video

Compression	H.265, H.264, MPEG-4, MJPEG
Built-in Analytics	Visual Tracking

Audio

Audio Type	2-way, Mic-in, Line-out
------------	-------------------------

Network

Network Protocol & Service	IPv4/v6, TCP, UDP, DHCP Client, HTTP, DNS, NTP, RTP, RTSP, SMTP, FTP, ICMP, ARP, UPnP, LDAP (client), iSCSi
Ethernet Port	Total ports: 2 port(s) Non-PoE: 2 port(s), Ethernet (1000 Base-T), RJ-45 connector

Recording

Scheduled Recording	Yes
Event Recording	Yes
Manual Recording	Yes
Event Speed-up Recording	Yes
Dual Stream Management	Yes
Maximum Recording Throughput	300 Mbps

Search & Playback

Playback Control	Continuous forward and backward playback with speeds 1x/2x/4x/8x/16x or frame-by-frame, pause, stop
Synchronized Playback	9 channels (Local), 64 channels (Remote)
Recording Search	Search video recordings by time, events, channels, bookmarks, notifications and listed as clickable time-based thumbnails for full-size view and snapshot download
Smart Search	Smart search of recorded video by Motion Detection and Tamper
Video Export	RAW, AVI, EXE

Event

Event Trigger	<p>[NVR]: Disk full, Disk not found, Disk is available, Schedule service start and stop, Video Push start and stop, CPU limit exceeded.</p> <p>[Video Device]: Video motion detection, Passive IR sensor, External device through digital input, Sound detection, Intelligent event detection, RFID detection, Video Push start and stop, Video loss, Video Recovery, Network loss and recovery.</p> <p>[Extended Device]: Point-of-sale (POS) status, Network I/O status, Access Control status, Car park status</p>
Event Response	<p>Pop-up window with live video and event confirmation activation, Switch to hotspot window, Switch to customize view, Command a PTZ device to go to a preset point, Play alert sound, Activate external device through digital output, Execute system command to activate other programs, Upload video or snapshot to FTP server, E-mail notification with snapshots, Push notification</p>

Redundancy Server

Redundancy Service	Yes, N-to-N, N+1 (With limited functions when NVR 3 server acts as Redundancy server)
--------------------	---

System

Permission control	Unlimited number of users, Active Directory, Customizable permissions for user groups, Account lockout, Automatic logout after idle, Playback password protected, Password validity period
Client PC Operating System	Windows 7 SP1, Windows 8.1, Windows 10, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Server Operating System	Windows 7 Embedded, Windows 10 IoT (Optional)
Mobile Client Program	Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, Video Push, Event/time based search and playback, Supported device(s) iOS, Android device
USB	4-Port USB 2.0, 2-Port USB 3.0

Integration

Unified Solution	Fully compatible with ACTi cameras, encoders, central management system, TV wall and intelligent video surveillance software
GPS Position	Manual setting
ONVIF Compliant	Yes, Profile S
Web Browser	IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.)
Third-party Integration	Point of Sale (POS), Access Control, Network I/O, Parking Management Station (PMS), (Various optional integrations requiring additional license)

Storage

Supported Storage Technology	NAS, SAN
System Drive	SSD, 128GB
Storage Bay	SATA, Max. 8 Disk(s) (without storage disks)
HDD Size	3.5"
Maximum Recording Capacity	14TB x8
RAID Level	Hardware RAID 0, 1, 5, 10, (RAID 5: support up to 100 channels)
Supported Storage	Video Recording: SATA disk, iSCSI Export: iSCSI, USB

Interface


External Storage Interface	eSATA, iSCSI, USB
Local Access	USB joystick, keyboard & mouse
Local Display Interface	DVI x 1, VGA x 1, Display Port x 2,

General

Power Source	AC 100-240V
Weight	11538g (25.437lb)
Dimensions	(W x H x D): 437mm x 88.1mm x 533.4mm (17.2" x 21" x 21") Rack Space: 2U
Mount Type	Rackmount rails(19", 26")


Fan	Yes
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% - 85% RH
Remote Access	Workstation, Web Client, Mobile Client
Approvals	CE, FCC, UL (for built-in power adapter)
Warranty	3 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

▶ Photo Indication

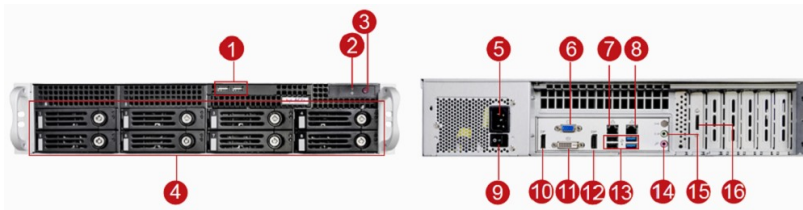

- 1 USB Port
- 2 Power Status LED
- 3 Power Button
- 4 Storage Disk Bays
- 5 AC Power Connector
- 6 VGA Connector
- 7 LAN1
- 8 LAN2
- 9 Power Switch
- 10 DisplayPort 1
- 11 DVI Port
- 12 DisplayPort 2
- 13 USB Port
- 14 Audio Mic-in
- 15 Audio Line-out
- 16 eSATA Port

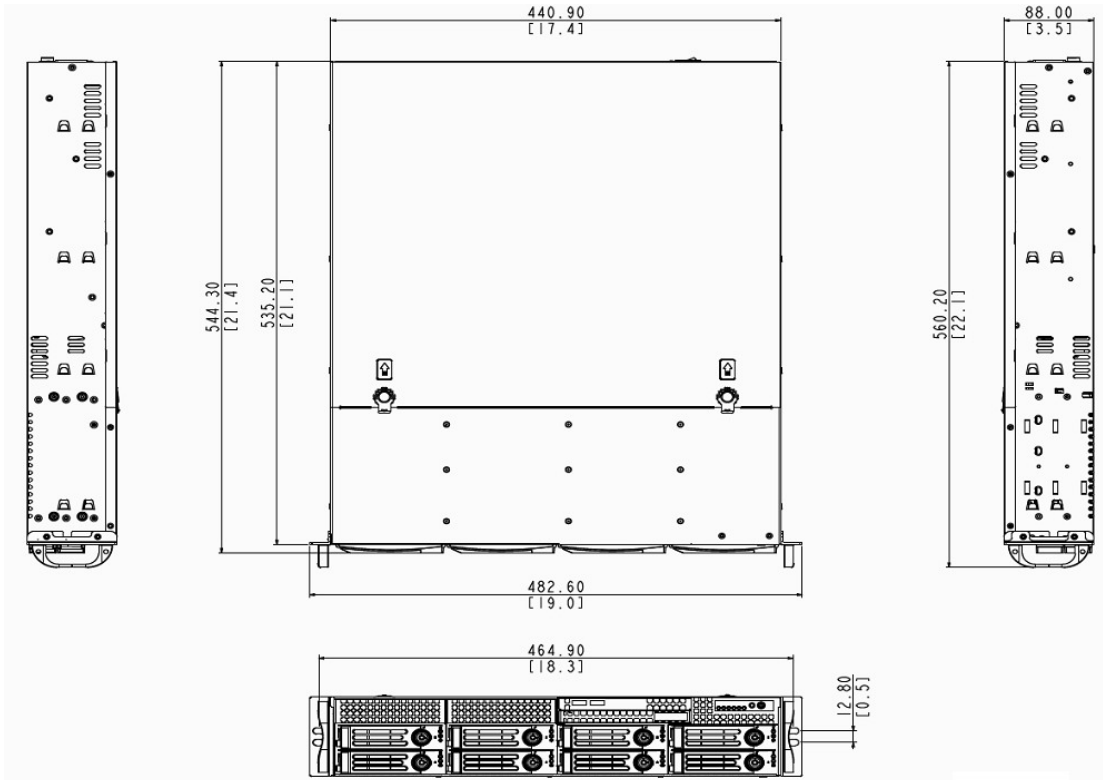

▶ Dimension Diagram



Unit: mm [inch]










▶ Related Products

Mounting Accessories - Standalone NVR Mount


PMAX-1200		19" Rackmount Rails for for GNR-320, GNR-410, INR-406, INR-407, INR-410, INR-460
PMAX-1201		26" Rackmount Rails for for GNR-320, GNR-410, INR-406, INR-407, INR-410, INR-460

Note: Some mounting accessories may need additional accessories for installation. Please check www.acti.com/mountingselector for more information.



Network & Storage Peripherals - Hard Disk

PHDD-1E12		2.5" 256G SATA SSD System drive with Windows 10 and NVR software for INR-460
PHDD-2200		WD WD1005FBYZ 1TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for ENR-0x0P, ENR-110, ENR-120, ENR-130, ENR-22x, ENR-22xP, GNR-310, GNR-320, INR-100, INR-340, INR-430, INR-440, INR-450, INR-460)
PHDD-2301		HGST ULTRASTAR 7K6000 2TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR- 0x0P, ENR-22x, ENR-22xP)
PHDD-2501		HGST ULTRASTAR 7K6000 4TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR-0x0P, ENR-22x, ENR-22xP)
PHDD-2702		WD Ultrastar 6TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2900		WD WD8002FRYZ 8 TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for GNR-310, GNR-320, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460)
PHDD-2A00		WD WD101KRYZ 10TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache (for ENR-xxx, ENR-xxxP, GNR-330, GNR-410, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460, INR-470)
PHDD-2B01		HGST ULTRASTAR 7K6000 12TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2E01		HGST ULTRASTAR 7K6000 14TB 3.5" Hard Disk Drive, 7200 RPM 512MB Cache


Network & Storage Peripherals - Extended Storage Device

PSTR-0201		PROWARE EP-2123-UA-R 2U 12-Bay eSata USB RAID Storage Device (for GNR-3000, GNR and INR Series except INR-440, INR-450)
-----------	---	---

Network & Storage Peripherals - Network IO Module

PIOB-0100		Advantech ADAM-6060 6 Digital Input and 6 Digital Output Network I/O Module
PIOB-0200		Advantech ADAM-4571 1-Port RS-232/422/485 Network I/O Module

Controllers - Joystick

PJSK-0100		Apem 100-550-BLK-RF Joystick for PTZ Control (for all ENR, INR, and MNR Series)
-----------	---	---

Data Cables - USB-Serial Converter Cable

PIOC-0200



USB to RS-232 Serial Converter Cable

Other Accessories - Accessory Part

R718-B0001



Windows License