

# UV-IPC-D124-PF28

**Uniarch**



- Uniarch
- IP Dome Camera
- 1/3" Progressive Scan CMOS
- 4 Megapixel (2560x1440)
- 2.8 mm Lens
- 0 Lux
- IR Range 30 m
- Compression Ultra265/H.265/H.264
- RJ-45 10/100 BaseT
- PoE IEEE802.3af
- Weatherproof IP67
- Vandal proof IK10
- IR Cut
- WEB, CMS, Smartphone and NVR interface
- ONVIF Compatible


## Features

- 4 MP IP Camera
- Uniarch range
- 1/3" Progressive Scan CMOS
- 2.8 mm Lens
- IR LEDs Range 30 m
- WEB, CMS, Smartphone and NVR interface

## Specs

**Range**  
**Image sensor**

Uniarch  
1/3" Progressive Scan CMOS

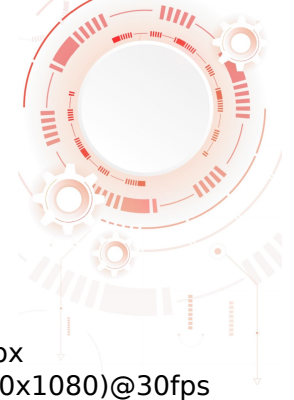

**Maximum resolution**  
**Main Stream rate**

4 Megapixel (2560x1440)  
4 Mpx (2560x1440)@20fps, 3 Mpx  
(2304x1296)@20fps, 1080P(1920x1080)@30fps  
[%VAR%]

**Extra Stream rate**  
**Compression**

720p (1 ~ 20 FPS)  
Ultra265/H.265/H.264

**Lens**  
**Minimum illumination**  
**Infrared range**  
**Image improvements**

2.8 mm  
0.02 Lux (Colour)  
30 m  
DWDR, AGC, 2D/3D-NR, Motion detection, ROI,  
Privacy Mask, Smart IR  
Mechanical ICR filter

**Day / Night**  
**Internal memory**

No

**Alarms**

No

**Audio**

No

**Network interface**  
**Remote access**

Ethernet 10/100 BaseT  
Web Browser, CMS Software (EZStation),  
Smartphone (EZView/EZLive)

**Interoperability**

ONVIF

**Power**

DC 12 V / 3.5 W, PoE IEEE802.3af

**Temp. operation**

-30° C ~ 60° C

**Degree of protection**

Waterproof IP67 / Anti-vandal IK10

**Dimensions**

81 (H) x 109 (W) mm

**Weight**

330 g

## **Package content**

- Uniview IP Camera
- Installation material
- User instructions