

8 MP Network Fisheye Camera

360° Panoramic IR Fisheye Camera



Wiz Mind

WizMind Series devices offer advanced Dahua Analytics+ functions for comprehensive, human-oriented analytic solutions. WizMind Series products deliver perimeter protection and advanced people counting with heat map functionality. WizMind is ideal for complex applications with demanding requirements that need advanced analytic capabilities.



- 1/1.7-in. 8 MP Progressive-scan CMOS Sensor
- 8 MP (3280 x 2480) at 30 fps Maximum Resolution
- Immervision Panomorph Lens RPL: B9VVT
- Triple Stream Encoding
- Smart H.265+ and Smart H.264+ Dual Codecs
- Analytics+ Functions — People Counting and Perimeter Protection
- Multiple Dewarp Modes
- Built-in Microphone and Speaker
- Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Maximum IR Distance 10 m (32.81 ft)
- IP67 Ingress Protection and IK10 Vandal Resistance
- Five-year Warranty*



People Counting

The camera uses complex real-time people counting algorithms to deliver accurate flow statistics from two distinct people counting functions, Line Crossing and Regional. The line crossing function counts the number of people crossing a defined line, and the regional function counts the number of people in a distinct, user-defined area. People counting is ideal for measuring the number of customers entering or exiting a location and to monitor groups of people in a distinct location.

Dewarping Mode

Fisheye dewarping solves the problem of distortion in the circular panoramic view. The camera offers multiple dewarping modes for different installations and configurations, either with a Dahua XVR, NVR, via the Web interface. Each dewarping mode offers options to adjust each scene.

Cybersecurity

Dahua network cameras are equipped with a series of key cybersecurity technologies including: security authentication and authorization, access control, trusted protection, encrypted transmission, and encrypted storage. These technologies improve the camera's ability to prevent malicious access and to protect data.

Protection

The camera allows for $\pm 25\%$ input voltage tolerance, suitable for the most unstable conditions for outdoor applications. Subjected and certified to rigorous dust and immersion tests (IP67) and impact tests (IK10), the camera is the choice for installation in even the most unforgiving environments.

System Overview

Dahua Fisheye Cameras provide detailed panoramic views in a compact, low-profile design. The CMOS sensor combined with a fisheye lens provide a high-quality 360° panoramic view without blind spots, making the camera the ideal solution for wide and open areas, such as airports, shopping malls and banks. The camera offers multiple dewarp modes for different installations and configurations that enhance the video for a specific scene. The IP67 environmental protection rating and the IK10 vandal resistance ensure the camera operates in the harshest environments.

Functions

Panomorph Technology

The fisheye camera incorporates Panomorph Technology from Immervision, an industry leader in 360° solutions and applications. Panomorph technology is comprised of patented panomorph optics and viewing functionality for optimal 360° image quality. The panomorph optic includes magnified zones of interest based on an innovative distortion control concept. The viewing functionality removes all added distortion and enables 360° immersive navigation within live or recorded 360° video. Immervision is the only universally-accepted 360° dewarping standard; all major VMS platforms and camera vendors support this technology.

Perimeter Protection

Dahua Analytics+ includes Tripwire and Intrusion functions that offer custom tripwires based on object type for automation in limited access areas. Perimeter Protection requires less pixels to detect an object to deliver improved accuracy and decreased false alarms due to lights, weather, trees, or animals.

Technical Specification					
Camera					
Image Sensor	1/1.7-in. 8 MP CMOS				
Total Sensor Pixels	3280(H) x 2480(V)				
RAM/ROM	4 GB / 2 GB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto, Manual, 1/3 s to 1/100,000 s				
Minimum Illumination	Color: 0.01 lux at F2.0 (30 IRE) B/W: 0.001 lux at F2.0 (30 IRE) 0 lux at F2.0 with IR on				
S/N Ratio	More than 56 dB				
IR Distance	Up to 10.0 m (32.81 ft)				
IR On/Off Control	Auto, Manual				
IR LEDs	Three (3)				
Lens					
Lens Type	Immevision Panomorph Lens – RPL: B9VVT Fixed				
Mount Type	M12				
Focal Length	1.29 mm				
Maximum Aperture	F2.0				
Angle of View	Horizontal: 360°				
Focus Control	Fixed				
Close Focus Distance	0.20 m (0.66 ft)				
DORI Distance ¹					
Detect (8 ppf)	Observe (19 ppf)	Recognize (38 ppf)	Identify (76 ppf)		
27.90 m (91.54 ft)	11.20 m (36.75 ft)	5.60 m (18.37 ft)	2.80 m (9.19 ft)		
Video					
Compression	Smart H.265+, H.265, Smart H.264+, H.264, H.264H, MJPEG (substream only)				
Streaming Capability	Three (3) Streams				
Resolution	8 MP (3280 x 2480), 2880 x 2160, 3 MP (2048 x 1536), 1.3 MP (1280 x 960), D1 (704 x 576), CIF (352 x 288)				
Effective Maximum Resolution, based on Dewarping Mode					
Dewarping Mode	Mount Location	Resolution (H x V)			
1 Original	All Locations	3280 x 2480			
1 Panoramic	Ceiling/Ground	4096 x 1024			
	Wall				
2 Panoramic	Ceiling/Ground	2432 x 2432			
1 Region	All Locations	1216 x 1216			
2 Regions	All Locations	2432 x 2432			
4 Regions	All Locations	2432 x 2432			
1 Original + 3 Regions	All Locations	2432 x 2432			
1. The DORI distance is a measure of the general proximity for a specific classification to help pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specifications and lab test results according to EN 62676-4, the standard that defines the criteria for the Detect, Observe, Recognize and Identify classifications.					
Main Stream					
Frame Rate	Stream 1	8 MP at 30 fps			
	Stream 2	D1 at 30 fps			
		1.3 MP at 30 fps			
Bit Rate Control					
Bit Rate					
Day/Night					
BLC Mode					
White Balance					
Gain Control					
Noise Reduction					
Motion Detection					
Region of Interest					
Advanced Features					
Privacy Masking					
Audio					
Compression					
Network					
Ethernet					
Protocol					
Interoperability					
Streaming Method					
Maximum User Access					
Edge Storage					
Web Viewer					
Management Software					
Mobile Operating System					
Cybersecurity					
Certifications					
Safety					
Electromagnetic Compatibility (EMC)					
Interface					
Audio					
Alarm					
Electrical					
Power Supply					
Power Consumption					

Environmental

Operating Conditions	-40 °C to +55 °C (-40 °F to +131 °F) Less than 95% RH
Storage Conditions	-30 °C to +70 °C (-22 °F to +158 °F)
Ingress Protection	IP67
Vandal Resistance	IK10

Construction

Casing	Metal
Dimensions	ø149.80 mm x 59.80 mm (ø5.90 in. x 2.35 in.)
Net Weight	0.79 kg (1.74 lb)
Gross Weight	1.21 kg (2.67 lb)

Recommended Installation Height

Indoor	Ceiling	3.0 m to 4.0 m (9.84 ft to 13.12 ft)
	Wall	2.0 m to 3.0 m (6.56 ft to 9.84 ft)
Outdoor	Ceiling	6.0 m to 8.0 m (19.69 ft to 26.25 ft)
	Wall	Depends on height of pole

Analytics+ Functions²

Perimeter Protection	<ul style="list-style-type: none"> Detects human violations using the following methods: Tripwire: a target crosses a defined line. Intrusion: a target enters or exits a defined perimeter. Monitors a combination of detection methods.
	<ul style="list-style-type: none"> Delivers accurate flow statistics from the following methods: Line Crossing: counts a person as they cross a threshold in a defined direction. Region: counts the number of people in a defined area. Counts people simultaneously from four (4) threshold lines and four (4) defined regions.
People Counting	

Intelligent Video System Functions

IVS triggers an alarm and takes a defined action for the following events:

Standard Features	<ul style="list-style-type: none"> Tampering with the camera. Error writing to an onboard Micro SD card. Error sending or receiving data over the network. Unauthorized access to the camera. IP Address Conflict

Advanced Feature

Heat Map	Generates a visual representation of data.
----------	--

- People Counting and Heat Map can be used concurrently, but the other IVS functions cannot be used together with People Counting or Heat Map.
- People Counting can be configured in the camera's Web interface as well as via a Dahua NVR.

Ordering Information

Type	Part Number	Description
8 MP Fisheye	N88BR5V	8 MP Panoramic Network IR Fisheye Camera,
Accessories, optional	PFA100	Mount Adapter
	DH-PFA132-E	Junction Box
	PFA150	Pole Mount (use with PFB302S or DH-PFA132-E)
	PFA151	Corner Mount (use with PFB302S or DH-PFA132-E)
	PFA152-E	Pole Mount (use with PFB302S or DH-PFA132-E)
	PFB300C	Ceiling Mount (use with PFA100)
	PFB302S	Wall Mount (use with PFA100)

Accessories

Optional:



PFA100
Mount Adapter



DH-PFA132-E
Junction Box



PFA150
Pole Mount



PFA151
Corner Mount



PFA152-E
Pole Mount



PFB300C
Ceiling Mount




PFB302S
Wall Mount



DH-PFM321D-US
12 VDC, 1 A Power Adapter

Junction Mount	Ceiling Mount	Wall Mount
PFA132-E	PFA100+PFB300C	PFA100+PFB302S

Mounting Diagram

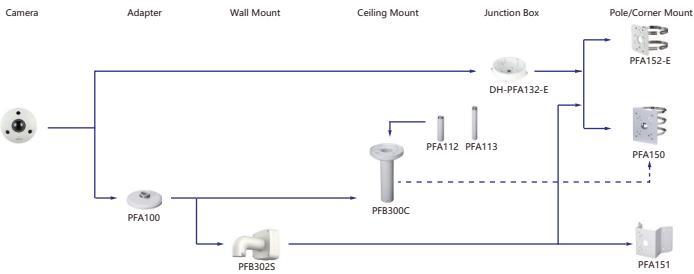

Dimensions (mm/inch)

