

## Quick Start Guide


SMT-3233 / SMT-4033

### Package Contents

- Stand is not provided as standard. Please purchase and install it separately.

Security LED Monitor / Power Cord / Quick Start Guide / Warranty Card / Remote Control, Batteries / D-Sub Cable


### Names and functions of each part

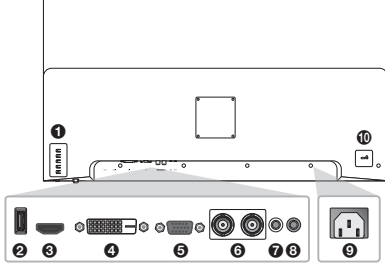


- ❶ Panel keys
- ❷ USB (USB 2.0 supported)
- ❸ HDMI
- ❹ DVI
- ❺ VGA
- ❻ CAM IN/OUT
- ❼ AUDIO IN
- ❽ AUDIO OUT
- ❾ Power
- ❿ Anti-theft Lock

### Connecting external devices


- Connecting the AV cable




- Connecting the VGA (D-SUB) cable

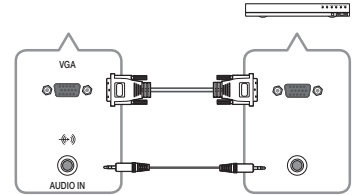

- Connecting the DVI Cable



- Connecting the HDMI cable



### PRODUCT SPECIFICATION

Items		SMT-3233	SMT-4033
Display	Screen Size	32"	40"
Power	Input Voltage / Current	AC 100 ~ 240V(50/60Hz)	
	Power Consumption	49W	55W
Environmental	Operating Temperature / Humidity	0 ~ +40°C (+32°F ~ +104°F) / 10% ~ 80% (non-condensing)	
	Storage Temperature / Humidity	-20 ~ +45°C (-4°F ~ +113°F) / 5% ~ 95% (non-condensing)	
Mechanical	Dimension (without Stand), Weight	727.7 x 433.2 x 48.8mm, 13.67 lbs	906.7 x 516.9 x 47.8mm, 19.62 lbs

- Standard dimensions for wall mount kits are shown in the table below.

Model name	VESA screw hole specs (A * B) in millimeters	Standard Screw	Quantity
SMT-3233	100 x 100	M8 / L14 ~ 16	4
SMT-4033			

\*Stand not included, optional accessory