




# SFP-2000-SM13-10

SFP Transceiver

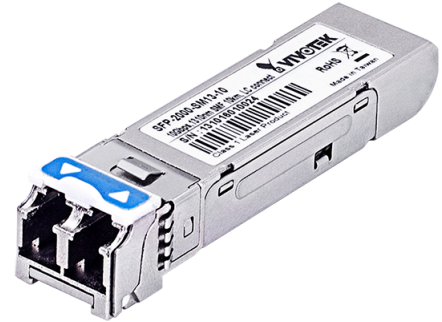

## Technical Specifications

Data Rate	10G
Wave Length	1310nm
Laser Type	DFB
Tx (dBm)	-8 ~ 0.5 dBm
RX (dBm)	-1 ~ -14.4 dBm
Voltage	3.3V
Transmission Range	9/125 $\mu$ m, up to 10km
Fiber Type (MMF / SMF)	SMF
DDM (Digital Diagnostics Monitoring)	Yes
Connector	LC
Dimensions	55.9 (L) x 14.69 (W) x 12.39 (H) mm
Operating Temperature	0 $\text{^{\circ}}$ C ~ 70 $\text{^{\circ}}$ C (32 $\text{^{\circ}}$ F ~ 158 $\text{^{\circ}}$ F)
Storage Temperature	-40 $\text{^{\circ}}$ C ~ 85 $\text{^{\circ}}$ C (-40 $\text{^{\circ}}$ F ~ 185 $\text{^{\circ}}$ F)
Humidity	5 ~ 90% (non-condensing)
MSA Compliant	Yes
Certifications	IEC 825, EN 60825-1, FDA 21 CFR 1040.10 and 1040.11