

UV-IPC-T134-AF28-DL-ECO

Uniarch




The Uniarch Turret IP camera is a reliable and robust solution to protect outdoor spaces with professional quality. With 4 megapixel resolution and a 2.8 mm lens, it delivers clear, sharp images every time. Its 0.01 Lux sensitivity allows capturing details even in very low light conditions, while its infrared night vision reaches up to 30 meters, guaranteeing continuous surveillance during the night. Thanks to its waterproof design with IP67, certification, it withstands rain, dust and extreme temperatures, ideal for demanding environments. PoE technology simplifies installation by combining power and data in a single cable, and ONVIF compatibility facilitates integration into existing systems. Efficient, resilient and always ready for action.

- Uniarch
- Turret IP Camera
- 1/3.0" CMOS
- 4 Megapixel (2560x1440)
- 2.8 mm Lens
- 0.01 Lux
- IR Range 30 m
- Compression Ultra265/H.265/H.264
- RJ45 10 M/100 M Base-TX Ethernet
- PoE IEEE 802.3af
- Weatherproof IP67
- IR Cut
- WEB, CMS, Smartphone and NVR interface
- ONVIF Compatible

Features

- Uniview-Uniarch Turret IP Camera
- 4 MP | Lens 2.8 mm

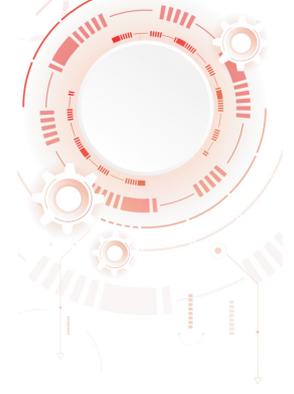

- IR 30 m | DWRD
- Human body detection
- PoE | IP67
- Integrated microphone

Specs

Range	Uniarch
Image sensor	1/3.0" CMOS
Day / Night	Mechanical ICR filter
Maximum resolution	4 Megapixel (2560x1440)
Lens	2.8 mm
FOV	Horizontal: 87.8° Vertical: 48.9° Diagonal: 99°
Range performance	Detect: 51.4 m Observe: 20.6 m Recognize: 10.3 m Identify: 5.1 m
Main Stream rate	4 MP (2560x1440)@30fps 1080P (1920*1080)@30fps 720P (1280*720)@30fps
Extra Stream rate	640*360@30fps 2CIF(704*288)@30fps CIF(352*288)@30fps
Compression	Ultra265/H.265/H.264
WDR	DWDR
Minimum illumination	0.01 Lux (Colour) 0 Lux with IR
Infrared range	30 m
Image improvements	DWDR, AGC, 2D/3D-DNR, ROI, Privacy Mask, Smart IR
Internal memory	Does not have
Alarms	Does not have
Audio	Built-in microphone
Network interface	Ethernet 10/100 BaseT
Remote access	Web Browser, CMS Software (EZStation), Smartphone (EZView/EZLive)
Power	2.5 W, PoE IEEE802.3af
Interoperability	ONVIF, API, SDK
Temp. operation	-30° C ~ 60° C
Degree of protection	Weatherproof IP67
Dimensions	65 (H) x 61 (W) x 140 (D) mm
Weight	150 g
Material	Plastic

Package content

- Uniview IP Camera
- Installation material
- User instructions