

# CMVR 324 / 325

Wisenet SKY Compact Cloud Managed Video Recorder



The Wisenet SKY Cloud Managed Video Recorder (CMVR) stores video and acts as a gateway from your premises to the Wisenet SKY Cloud Data Center where your video can also be stored and managed by the Wisenet SKY Cloud VMS. It provides secure video storage & video streaming, intelligent bandwidth management, and monitoring of cameras.

These small form factor CMVRs are designed for applications of up to 12 cameras when a server rack is not available. They are suitable for wall or shelf mounting. On-premises recording can be combined with cloud recording for additional redundancy, with an available subscription.

## Key Features

- Supports up to 12 @ 1MP cameras ~ 8 @ 4MP cameras\*
- Supports up to 5 cloud analytics, with supported license
- Intelligent Bandwidth Management with local recording up to 10 days (12 cameras @ 1MP)
- Dual gigabit network ports
- HDMI & DisplayPort video outputs for local display
- Compact form factor for wall or shelf mounting
- Fully cloud managed
- Supports motion or continuous recording
- Front panel indicator lights
- Supports Wisenet and ONVIF conformant IP cameras
- Complete encryption of video in transit and at rest

## STANDARD SUPPORT (Included)

- Free of charge with an active subscription
- No cost replacement with an active subscription
- 24/7 email and web support
- Standard phone support

## CMVR 324 / CMVR 325

| SYSTEM                  |   |
|-------------------------|---|
| Maximum Cameras @ 1MP   | 12 / 12   |
| Maximum Cameras @ 4MP   | 8 / 8   |
| Maximum Cloud Analytics | 5   |
| Hard Disk Drive         | 2TB / 2TB<br>2TB 10 days for 12 cameras @ 1MP         |
| Network ports           | Dual gigabit ethernet RJ-45 / Single gigabit ethernet |
| PoE Ports               | 0 / 4 PoE ports of IEEE802.3af class 3 (325 only)     |
| Video output            | 1x HDMI, 1x DisplayPort                               |
| USB ports               | 2x USB 3.0  |
| Operating System        | Embedded Linux  |
| Included accessories    | Wall mount, power supply                              |
| Ordering SKU            | EN-BR324-0 / EN-BR325-0                               |


| MECHANICAL / ELECTRICAL / ENVIRONMENTAL |  |  |
|---|--|--|
| Mechanical                              | Form Factor  | Compact wall or shelf mount  |
|   | Color / Material                                     | 324: Black / Plastic, 325 Black / Metal  |
|   | Dimensions   | 5.00" x 5.01" x 1.75" (125mm x 127mm x 47mm) 324<br>5.00" x 6.77" x 2.95" (127mm x 172mm x 75mm) 325 |
| Electrical                              | Weight   | 1.4lb (0.64kg) 324 / 4.24lb (1.92kg) 325   |
|   | Power Supply   | Included, 20 W / 22 W  |
|   | Power Input  | 100 ~ 240V AC  |
| Environmental                           | Operating Temperature                                | 32°F to 95°F (0°C to 35°C)   |
|   | Operating Humidity                                   | 0% to 70% RH, non-condensing   |
| Certification                           | FCC, UL, PSE, CE, CCC(S&E), REACH, RoHS, C-Tick, NDA |  |

\*The latest product information / specification can be found at [www.hanwhasecurity.com](http://www.hanwhasecurity.com)

**Please note:**


**An active subscription is required to use the Wisenet SKY Cloud VMS**

**\*Typical - please utilize the Wisenet SKY VMS CMVR Wizard for precise capacity**

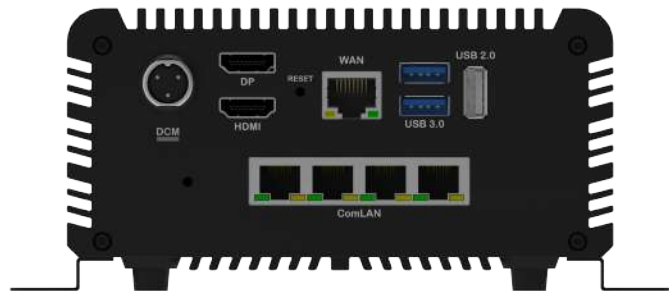

# CMVR 324 / 325

Wisenet SKY Compact Cloud Managed Video Recorder

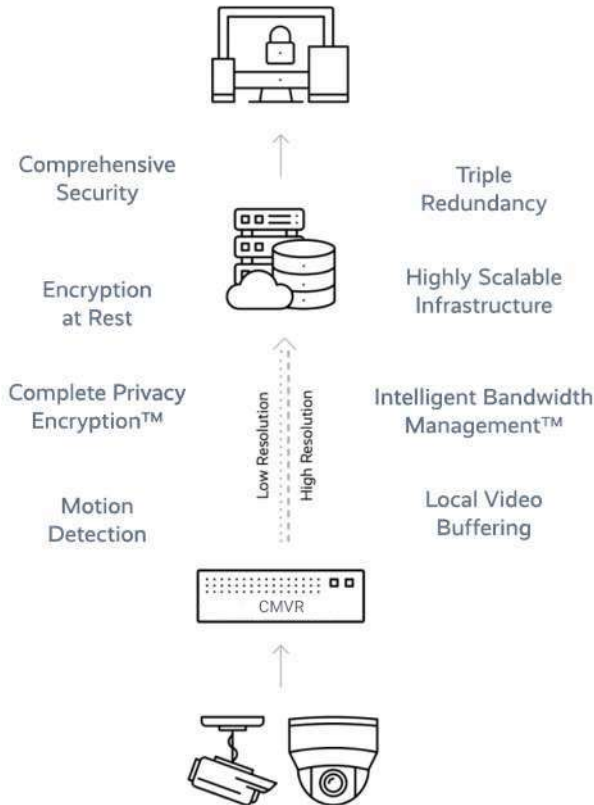

## NETWORK FEATURES

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts

## MANAGEMENT FEATURES

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video recording
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed

| MODEL                       | CMVR 324   | CMVR 325                                   |
|-----------------------------|--|--|
| Maximum Cameras (1MP)*      | 12 IP  |  |
| Maximum Cameras (4MP)*      | 8 IP   |  |
| Maximum Analytic Count*     | 5  |  |
| Video Recording             | 10 days for 12 cameras @ 1MP                             |  |
| Hard Drives                 | 2TB spinning drive                                       |  |
| POE Camera Ports            | None   | 4 IEEE802.3af Class 3                      |
| Network Ports               | Dual Gigabit   | Single Gigabit                             |
| Video Output                | 1x HDMI, 1x DisplayPort                                  |  |
| Dimension                   | 125 x 127 x 50 mm<br>5.00 x 5.01 x 1.75 in               | 127 x 172 x 75 mm<br>5.00 x 6.77 x 2.95 in |
| Included power supply       | External<br>100-240 VAC, 20 W                            | External<br>100-240 VAC, 22 W              |
| Operating Temperature Range | 0°C to 35°C<br>32°F to 95°F                              | -10°C to 50°C<br>14°F to 122°F             |
| Operating Humidity Range    | 0 to 70%   |  |
| Certifications              | FCC, UL, PSE, CE, CCC(S&E), REACH,<br>RoHS, C-Tick, NDAA |  |

\* Typical - please utilize the Wisenet SKY VMS CMVR Wizard for precise capacity