

Installation Guide


Cloud-Managed Outdoor Wireless Access Point

WI-AP310/WI-AP310-Lite/WI-AP316


Package Content




X1



X1



X1




X2



X1

Interface and Indicators

LED indicator instructions





Name	Status	Instruction
PWR	Bright	Outdoor AP be powered up
LAN/WAN	Flashing	LAN/WAN port date transmit
	Bright	LAN/WAN port connected
LAN	Flashing	LAN port date transmit
	Bright	LAN port connected
WLAN	Bright	Show Wi-Fi signal strength

Ports Instructions





Ports & Buttons	Ports Instructions
DC IN	12V 1A DC Input
LAN	at both Fit AP and Router mode, this port always is LAN
LAN/WAN	At Fit AP mode this port is LAN, at Router mode this port is WAN
Reset	Reset button, press it for 8seconds for Revert to factory settings

Typical Connection

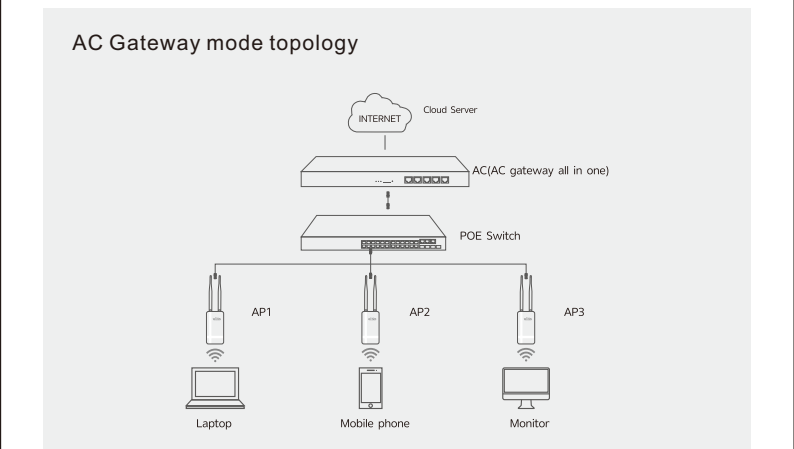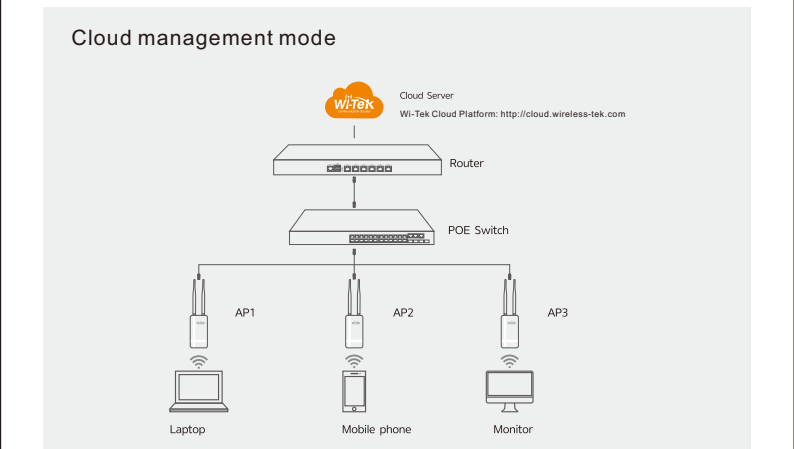

Device installation

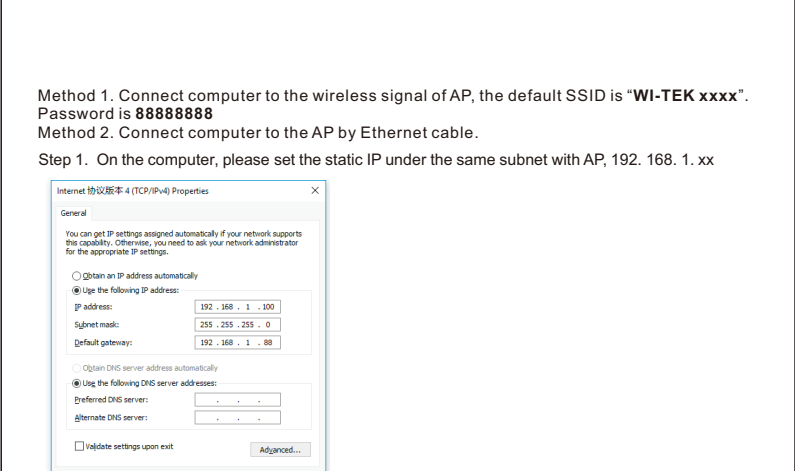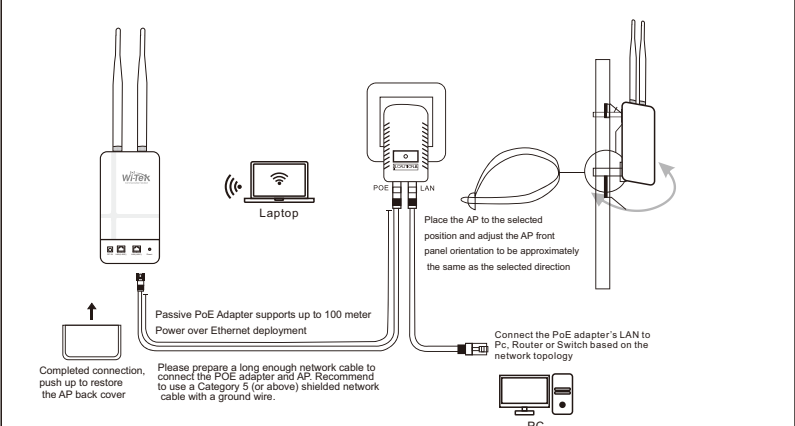

Cloud management settings

Step 2. Please launch a browser such as Google Chrome or Firefox, type **192.168.1.88** into address bar and click on enter to get in the login page of wireless access point. The default login password is **"admin"**.

*Login device

admin

Step3. After get in the management page, On the left side menu, please go to [Wizard] to setup the access point

Step4. Select the appropriate operation mode and follow the instruction of wizard to finish the settings. If already exist a Router in your network, please choose, Fit AP mode; if not, you can choose Wireless Router mode
Notice: if you do a reset, AP will recovery to Fit AP mode

•Fit AP Mode default Login IP: 192.168.1.88 admin/admin



•Wireless Router Mode default Login IP: 192.168.11.1 admin/admin




Cloud management settings

Step 1 Launch your web browser then enter **http://cloud2.wireless-tek.com** in the address bar.


Step 2 Register an account password with user name or email.

Step 3 log in to the cloud account with the account password after registration.

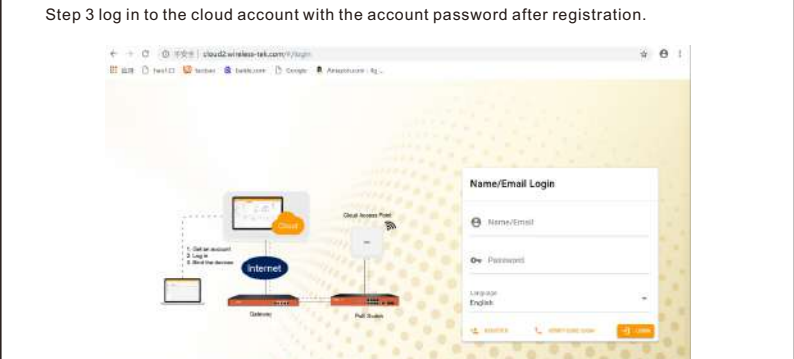


After the login is successful, the steps to bind the device on the cloud account are as follows:

(1) Click **ADD NETWORK**

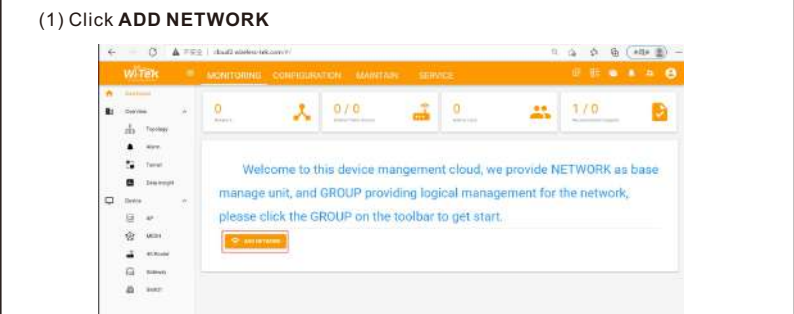

Cloud management settings

(2) Fill in the group name and location, click **save**.

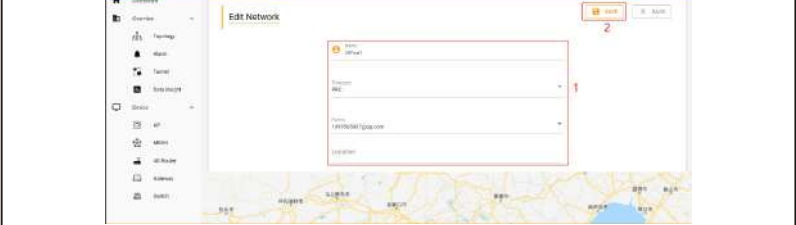

(3) And click **next**.




(4) Enter serial number, click **ADD** to create and click **FINISH**, the configuration is complete.

Note: The 17-digit SN code of the Add device is shown on the sticker on the back of the device.




Cloud management settings

(5) In the relevant device options, you can see the bound device information.

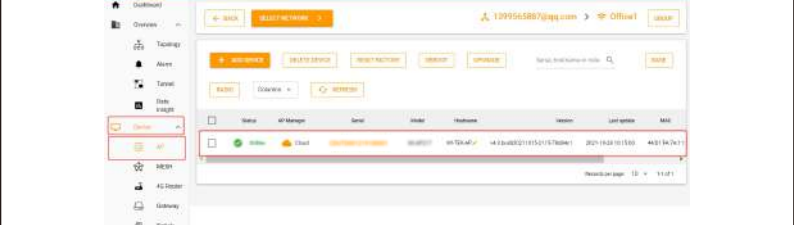

(6) Click **Tunnel**, Select binding device type, click **EWEB** to log in to the device.

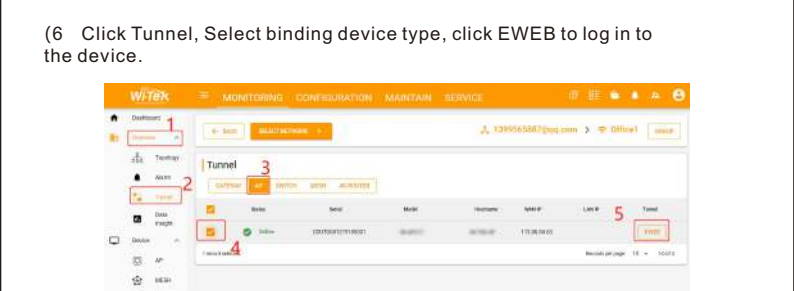

(7) Click **ADD NETWORK**



Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disaster, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.



Wireless-Tek Technology Limited
Address: Room 402 4F, BiaoFan Technology Building, Bao'An Avenue, FuYong Town, Bao'An district, ShenZhen
Website: www.wireless-tek.com
Tel: 86-0755-32811290
Email: sales@wireless-tek.com
Technical Support: tech@wireless-tek.com