



# AVN-PO-EXT22G


22W POE OUTDOOR EXTENDER (IEEE802.3 AT STANDARD)

## OVERVIEW

- Mini-size, wall mounting
- Requires no external power supply
- Low power consumption, only 2W
- Auto-sensing PoE devices
- Compatibility with 802.3af and 802.3at

## DIMENSIONS

Unit : inch(mm)

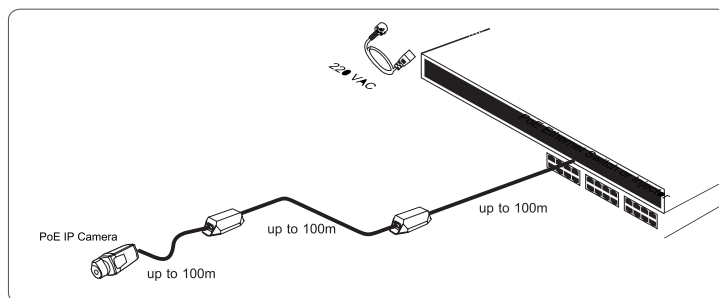

## SPECIFICATIONS

DESCRIPTION	
Number of channels	1
Pass Through Data Rates	10/100/1000 Mbps half/full duplex
Power over Ethernet input	Pin Assignment and Polarity: Both 1/2 (-), 3/6 (+) and 7/8 (-), 4/5 (+)
Power over Ethernet	Pin Assignment and Polarity: 1/2 (-), 3/6 (+)
Output	Output Power: up to 22W
Connectors	Shielded RJ-45, EIA 568A and 568B
Network cables	Shielded category 5 (or higher)
Dimensions	140mm x 40mm x 30mm (W x D x H)
Mounting	Wall of shelf
Environment	Outdoor IP65
Environmental Conditions	Operating Ambient Temperature: -40°C to 75°C Operating Humidity: Maximum 90%, Non-condensing Storage Temperature: -40°C to 75°C Storage Humidity: Maximum 95%, Non-condensing
Regulatory Compliance	IEEE 802.3af (PoE), IEEE 802.3at (PoE+) RoHS Compliant, CE, FCC
Electromagnetic	FCC Part15, Class B