

# DC-D4512WERA 4.3mm

## H.265 5MP AI IR Turret Camera (LightMaster NIR)



Easy installation with DirectIP NVR  
H.265 and Intelligent Codec

PoE (IEEE 802.3af Class 3)  
IR LED (Distance : 30 m / 98.4 ft)

IDIS Deep-Learning Analytics (IDLA)

### SPECIFICATIONS


Video	
Image Sensor	1/2.8" CMOS
Max. Resolution	2592 x 1944
Scanning Mode	Progressive Scan
Lens Type	Fixed-focal
Focal Length	4.3mm
Aperture	F1.6
Iris Control	Fixed Iris
Angular Field of View	4:3 mode : 80o(H) 56.7o(V) 106.9o(D) 16:9 mode : 80o(H) 41.1o(V) 95.4o(D)
Min. Illumination	COLOR : 0.13 lux @ F1.6 B/W : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	Yes (ICR)
IR Distance (LEDs)	30m / 98.4 ft (4ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	-
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Object Metadata: Human, Vehicle, Face IDLA: Object Detection, Intrusion, Loitering, Line Crossing, Face Detection ETC: Video Motion Detection, Active Tampering Alarm
Video Out	-
Pan/Tilt/Rotate	
Pan Range	-180° ~ 180°
Tilt Range	-5° ~ 70°
Rotate Range	-180° ~ 180°
Network	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Yes
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	Opus, ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF Profile S/T
Max. Frame Rate	4:3 mode : 30ips : 2592 x 1944(WDR) 16:9 mode : 30ips : 2592 x 1456(WDR)
Supported Resolution	4:3 : 2592x1944, 1920x1440, 1280x960x 640x480 16:9 : 2592x1456, 1920x1080, 1280x720, 640x360
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, uPNP, SNMPv2
Security	Digest authentication, Password Protection, User access log, IP Filtering, IEEE802.1x(EAP-TLS), Chained Fingerprint, SSL Encryption, HTTPS Encryption
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLSrec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
Alarm and Event	
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Object Detection, Intrusion, Loitering, Line Crossing, Face Detection
Event Notification	Remote S/W, Email (with Image)
Audio Alarm	Yes
Audio In / Out	1(Built In MIC)+1 / 1
Alarm In / Out	1 / 1
Environmental	
Vandal Proof Casing	IK10
Outdoor Ready	IP67
Operating Temperature	-40°C ~ +55°C (-40°F ~ +131°F) *Starting up at above -20°C (-4°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Source	PoE (IEEE 802.3af Class 3)
Power Consumption	PoE, IEEE 802.3af(Class 3), 7.6W
Approval	FCC, CE, KC
Mechanical	
Dimensions	Ø121 x 78.7mm (Ø4.76" x 3.1")
Weight	605g (1.3lb)




### PRODUCT IMAGE





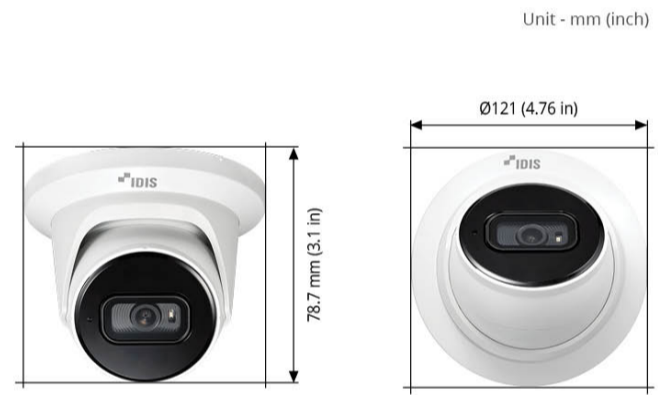



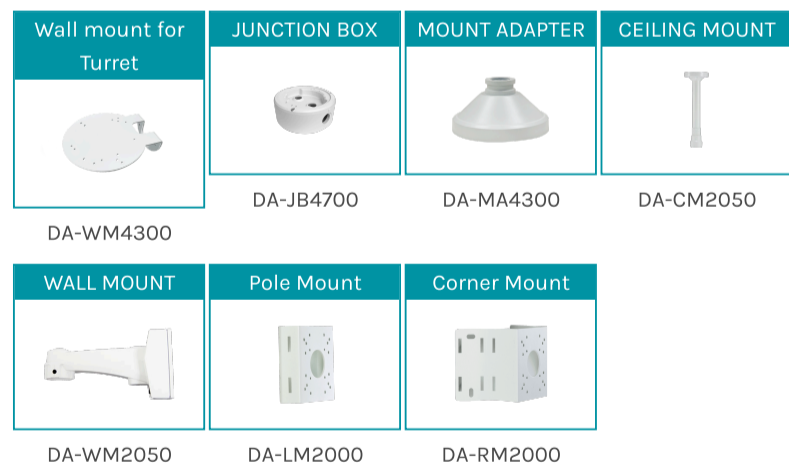



### DIMENSIONS



### ACCESSORIES (OPTIONAL)



# ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-D4512WERA 4.3mm	WALL	 <span>WALL</span> Model: DA-WM4300
		or
	WALL	 <span>WALL</span> Model: DA-JB4700
		 <span>CEILING</span> Model: DA-MA4300
	CELLING	 <span>CEILING</span> Model: DA-CM2050
		 <span>POLE</span> Model: DA-MA4300
	POLE	 <span>POLE</span> Model: DA-WM2050
		 <span>POLE</span> Model: DA-LM2000
		 <span>CORNER</span> Model: DA-MA4300
	CORNER	 <span>CORNER</span> Model: DA-WM2050
		 <span>CORNER</span> Model: DA-RM2000