

DC-T4831HRX

8MP IR Bullet Camera with Heater



Easy installation with DirectIP NVR
 8MP (3840x2160) resolution
 Motorized Vari-focal lens (f=2.7 - 13.5mm)
 micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
 Two-way audio

Alarm in / out
 IK10 / IP67 supports
 Built-in heater
 PoE (IEEE 802.3af Class 3), 12V DC
 Day and night (ICR)

True wide dynamic range (WDR)
 IR LED (Distance : 40m / 131.2ft)
 3-axis mechanical design for installation
 Supports ONVIF

SPECIFICATIONS

Video	
Image Sensor	1/2.8
Max. Resolution	3840 x 2160
Scanning Mode	Progressive Scan
Lens Type	Motorized Vari-focal
Focal Length	f=2.7-13.5mm
Aperture	F1.8 - 3.32
Iris Control	DC IRIS
Angular Field of View	Wide : 110.6°(H) 57.3°(V) 134.1°(D), Tele : 32.6°(H) 18.3°(V) 37.4°(D)
Min. Illumination	COLOR : 0.2 lux @ F1.8 B/W : 0 lux (IR LED ON)
Dynamic Range	120dB(True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 - 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	IR cut filter with auto switch
IR Distance (LEDs)	40m / 131.2ft (6ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	On / Off
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	-
Privacy Masking	8 Zones
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone
Video Out	-
Network	
Video Compression	H.265, H.264 (MP) M-JPEG
Intelligent Codec	Supported
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF Profile S
Max. Frame Rate	30ips : 3840 x 2160, 15ips : 3840 x 2160(WDR)
Supported Resolution	3840 x 2160, 1920 x 1080, 1280 x 720, 640 x 360
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, uPNP, SNMPv2
Security	SSL Encryption, Multi-user Authority, IEEE 802.1x, IP Filtering, HTTPS
Remote Access Client	DirectIP NVR Connection, IDIS Web, IDIS Mobile, IDIS Solution Suite
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLTSec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
ALARM AND EVENT	
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone
Event Notification	Remote S/W, Email (with Image)
Audio In/ Out	1 / 1
Alarm In / Out	1 / 1
Environmental	
Vandal Proof Casing	IK10
Outdoor Ready	IP67, Heater
Operating Temperature	-40°C ~ 55°C (-40°F ~ 131°F), Starting up at above -20°C (-4°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Source	12VDC, PoE IEEE 802.3af (Class 3)
Power Consumption	12V-, 1.1A, 13.2W PoE, IEEE 802.3af(Class 3), 11.7W
Approval	FCC, CE, KC
Mechanical	
Dimensions (W x H)	80mm X 75mm X 237mm(3.15" x 2.95" x 9.33")
Weight	1.006kg




PRODUCT IMAGE









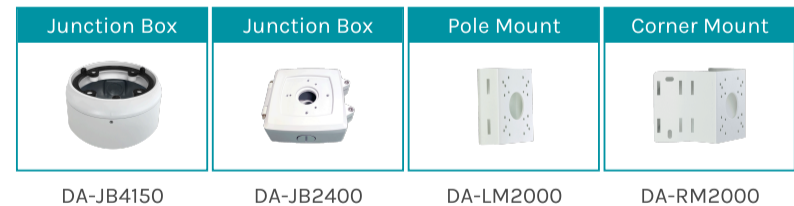





DIMENSIONS



ACCESSORIES (OPTIONAL)



ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-T4831HRX	WALL	 WALL Model: DA-JB4150
		or
	WALL	 WALL Model: DA-JB2400
		CEILING
	CELLING	 CEILING Model: DA-JB4150
		or
	CELLING	 CEILING Model: DA-JB2400
		POLE
	POLE	 POLE Model: DA-JB4150
		+
		 POLE Model: DA-LM2000
		or
		 POLE Model: DA-LM2000
		+
POLE	 POLE Model: DA-JB2400	
	CORNER	
CORNER	 CORNER Model: DA-RM2000	
	+	
	 CORNER Model: DA-JB2400	
	or	
	 CORNER Model: DA-JB4150	
	+	
 CORNER Model: DA-RM2000		