

DC-T4538WRA

H.265 5MP Bullet Camera (LightMaster NIR)



Easy installation with DirectIP NVR
H.265 and Intelligent Codec

PoE (IEEE 802.3af Class 3)
IR LED (Distance: 40 m / 131.2 ft)

IDIS Deep-Learning Analytics (IDLA)

SPECIFICATIONS

Video	
Image Sensor	1/2.8" CMOS
Max. Resolution	2592 x 1944
Scanning Mode	Progressive Scan
Lens Type	Motorized Vari-focal
Focal Length	2.7 ~ 13.5mm
Aperture	F1.4 ~ F3.2
Iris Control	DC Iris
Angular Field of View	[4:3 mode] Wide : 101.2o(H) 72.6o(V) 137.4o(D) Tele : 30.4o(H) 22.8o(V) 38o(D) [16:9 mode] Wide : 101.7o(H) 53.3o(V) 121.6o(D) Tele : 30.2o(H) 17o(V) 34.7o(D)
Min. Illumination	COLOR : 0.13 lux @ F1.4 B/W : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	Yes (ICR)
IR Distance (LEDs)	40m / 131.2 ft (6ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	-
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	-
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Object Metadata: Human, Vehicle, Face IDLA: Object Detection, Intrusion, Loitering, Line Crossing, Face Detection ETC: Video Motion Detection, Active Tampering Alarm
Video Out	-
Network	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Yes
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	Opus, ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF Profile S/T
Max. Frame Rate	4:3 mode : 30ips : 2592 x 1944(WDR) 16:9 mode : 30ips : 2592 x 1456(WDR)
Supported Resolution	4:3 : 2592x1944, 1920x1440, 1280x960, 640x480 16:9 : 2592x1456, 1920x1080, 1280x720, 640x360
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNT, SMTP, FEN, mDNS, Upnp, SNMPv2
Security	Digest authentication, Password Protection, User access log, IP Filtering, IEEE802.1x(EAP-TLS), Chained Fingerprint, SSL Encryption, HTTPS Encryption
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLTsrec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
Alarm and Event	
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Object Detection, Intrusion, Loitering, Line Crossing, Face Detection
Event Notification	Remote S/W, Email (with Image)
Audio Alarm	Yes
Audio In / Out	1 / 1
Alarm In / Out	1 / 1
Environmental	
Vandal Proof Casing	IK10
Outdoor Ready	IP67, Heater
Operating Temperature	-40°C ~ +55°C (-40°F ~ +131°F) *Starting up at above -20°C (-4°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Source	12VDC, PoE, IEEE 802.3af(Class 3)
Power Consumption	12V=, 1A, 12W PoE, IEEE 802.3af(Class 3), 9.7W
Approval	FCC, CE, KC
Mechanical	
Dimensions	89.3mm X 89.3mm X 277.6mm (3.52" x 3.52" x 10.93")
Weight	1.293kg (2.851lb)




PRODUCT IMAGE









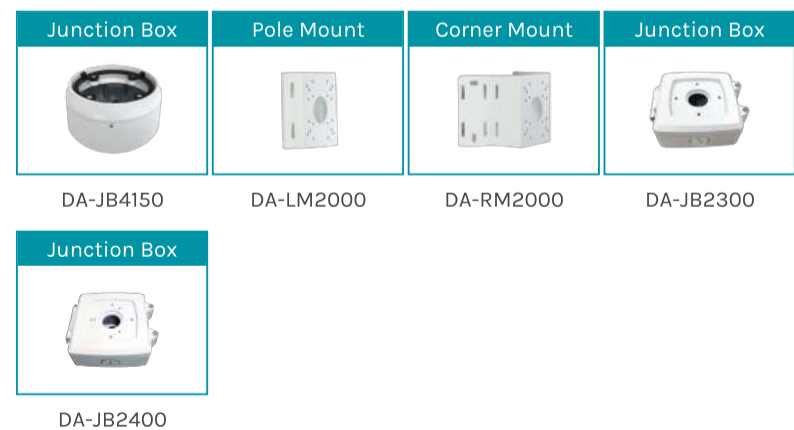






DIMENSIONS



ACCESSORIES (OPTIONAL)



ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-T4538WRA	WALL	 WALL Model: DA-JB4150
		or
		 WALL Model: DA-JB2300
	or	
	 WALL Model: DA-JB2400	
	POLE	 POLE Model: DA-JB4150
		+
		 POLE Model: DA-LM2000
		or
		 POLE Model: DA-JB2300
		+
		 POLE Model: DA-LM2000
		or
		 POLE Model: DA-LM2000
	+	
	CORNER	 CORNER Model: DA-JB4150
		+
		 CORNER Model: DA-RM2000
or		
 CORNER Model: DA-JB2300		
+		
 CORNER Model: DA-RM2000		
or		
 CORNER Model: DA-JB2400		